


## Insulation Piercing Connector

### Medium Voltage Covered Conductor

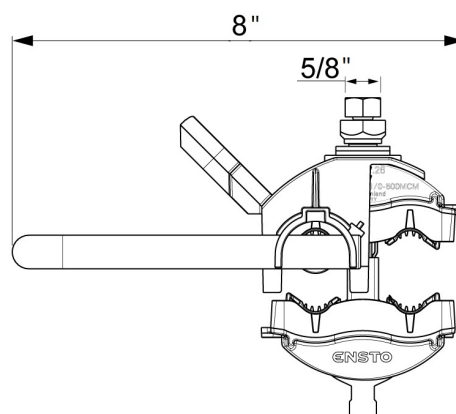

### Description

The watertight shear head bolt connector is designed for medium voltage covered conductor. The stirrup enables installation using a hot stick and allows the connector to act as a grounding point while maintaining the integrity of the covered conductor system.

### Technical Data

#### General

Conductor Range:	1/0 - 500 kcmil
Conductor Diameter:	0.72 - 1.15"
Jacket Thickness:	0.165"
Weight:	2.29 lbs
Tightening Torque:	26.5 - 29.5 ft-lb
Voltage:	15 kV

### Product Information

#### Product Code

SLW27.26LL

#### Features

- Eliminates the need for conductor stripping and special tools
- No tape or cover required
- Watertight and corrosion resistant
- Equipped with a tin-plated copper stirrup designed for easy installation using a hot stick on an energized lines