



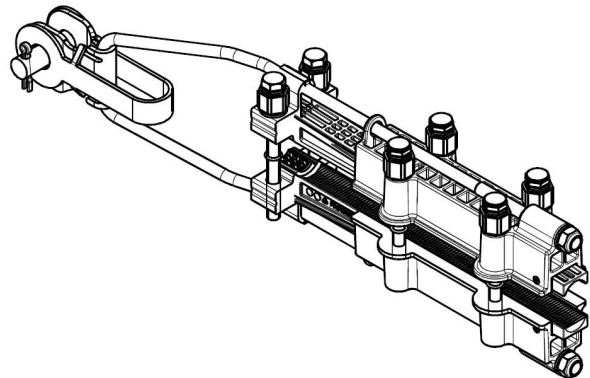

551S 90S / P12M

αξόνιες νύξεις / ύψος / ύψος / ύψος

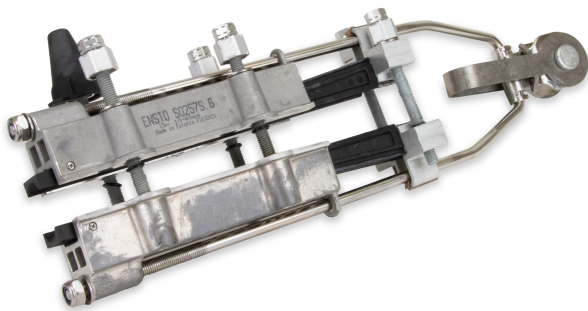

Description

Ensto's dead-end clamp is equipped with insulation piercing teeth for covered conductor, silicone seals for protection, and shear-head bolts for proper torquing.

Technical Data

General

Conductor Range:	- 0 3000
Max System Voltage:	3
Tightening Torque:	16.2 ft-lbs
Temperature-range:	-40°F to 176°F
Weight:	5.4 lbs
Cable Types:	Covered Cu & Al
SMFL:	6,700 lbf

Product Information

Product Code

{h 7}

Features

- Shear-head bolts for proper torquing
- Light-weight aluminum alloy design
- Wedge-style design for proper alignment during installation
- Insulation piercing teeth for connection with covered conductor