



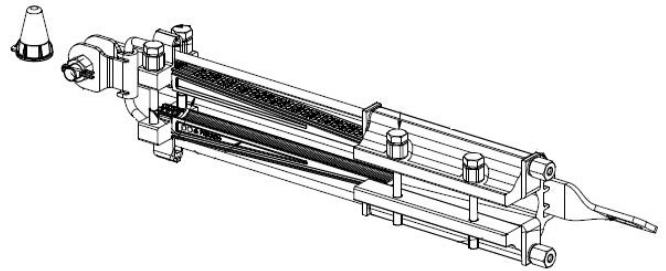

) - #
U † # #

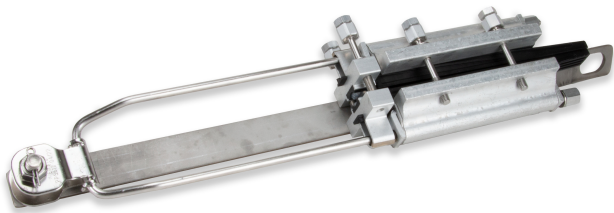

Description

Ensto's dead-end clamp is equipped with insulation piercing teeth for covered conductor, silicone seals for protection, and shear head bolts for proper torquing.

Technical Data

General

Conductor Range:	- 0
Max System Voltage:	†
Tightening Torque:	18. ft-lbs
Temperature-range:	-40°F to 176°F
Weight:	12.2 lbs Covered
Cable Types:	Cu & Al
SMFL:	13,400 lbf

Product Information

Product Code

0\ 0

Features

- Shear-head bolts for proper torquing
- Stainless Steel construction for corrosive environments
- Wedge-style design for proper alignment
- Insulation piercing teeth for connection with covered conductor