




Insulation Piercing Connector SLW27.261

Medium Voltage Covered Conductor

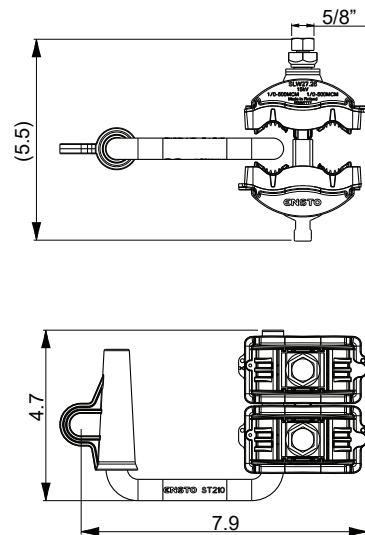

Description

The watertight shear head bolt connector is designed for medium voltage covered conductor utilizing non-tension aluminum to aluminum connections without the need to strip the conductor. Includes a tin plated C-shape copper stirrup.

Technical Data

Conductor Range:	1/0 - 500 kcmil
Conductor Diameter:	0.72 - 1.15"
Jacket Thickness:	0.165"
Weight:	2.03 lbs
Tightening Torque:	26.5 - 29.5 ft-lb
Voltage:	15 kV

Product Information

Product Code

SLW27.261

Features

- Eliminates the need for conductor stripping and special tools
- Watertight and corrosion resistant
- No tape or cover is required after installation
- Stirrup allows for installation of a connection point while maintaining integrity of the covered conductor system

Ensto North America
4500 S. Hardin Blvd.
Suite 460
McKinney, TX 75070, USA

+1 972.369.7788
Sales.US@ensto.com
www.ensto.com

Better life.
With electricity.