ENSTO

Solutions for Underground Cable Networks

1–42kV



Better life.
With electricity.

Terminations, joints, lamp post fixtures, cable distribution cabinets and tools

ensto.com







Content


Ensto – Electrical Solution Provider 4
Ensto underground cable solutions 6
Ensto Pro Training Academy. 8
Cable lugs and connectors. 10
Low voltage solutions 14
Medium voltage solutions 22
Cable distribution cabinets 44
Lamp post fixtures 46
Tools 50



Electrical solutions for better tomorrow.

Ensto designs and provides innovative and reliable electrical solutions and expertise for electricity distribution system operators.

Ensto is an international, growth-oriented family business and technology company, which has dedicated to electricity with a long-term and human-centric approach for over 60 years.
Our aim is to become a leading expert for distribution system operators and help them to succeed and create a more sustainable tomorrow.
We offer innovative and reliable, long life-cycle overhead lines, underground networks, network automation and new smart technology products and solutionsfor electricity distribution networks.
Our own R&D, manufacturing and laboratories give us the expertise to continually innovate and serve our customers on an individual level.
We are bound by our common purpose: making life better with electricity. Sustainably.

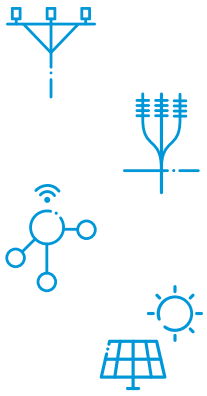



Well Functioning Solutions

Ensto´s solutions play a key role in building reliable, low-loss electricity distribution networks with disturbance-free service. High-quality products guarantee lower total costs for creating robust distribution networks.

We have thorough experience and knowledge of distribution networks in even the most demanding conditions: cold, hot, and stormy surroundings all over the world. Our products are developed in close cooperation with our customers. They are designed for a long service life, minimal need for maintenance, and a low life-cycle impact on the environment.

Tested to Meet Your Expectations

Ensto has fully equipped and calibrated testing laboratories in-house; even an accredited one in our headquarters in Finland. We test our products to ensure meeting the toughest national and international standards – in fact, beyond standard requirements. We work with many international test laboratories and use well-known external laboratories for certification testing.

Answers Close to You

Ensto has local sales personnel in 17 countries, allowing us to serve and support our customers flexibly in their own language, thanks to a strong local presence. In addition, we sell throughout the world to more than 100 countries.

Unique Training

Ensto's extensive training program Ensto Pro provides continuing support and comprehensive training for our customers. The benefits of this training include time, cost, and energy savings and fewer installation errors. Moreover, we receive reliable input on the solutions the customer truly needs. All Ensto Pro training sessions are customized according to customer needs.

Focus on Energy-Efficiency

Ensto is committed to building sustainable energy infrastructure with energy-efficient solutions.

Higher-quality power and lower distribution losses are key to energy efficiency. Sustainability and efficiency are also achieved via recyclable materials, local expertise, and in-house manufacturing.


Ensto's solutions for network power quality improve efficiency in electricity distribution and the quality of electricity. They save your time, money, and energy.



Ensto underground cable solutions

Comprehensive products and training

A well designed underground cable network guarantees uninterrupted electricity distribution. The Ensto Pro training academy provides professionals a comprehensive range of both theory based information and practical installation work.

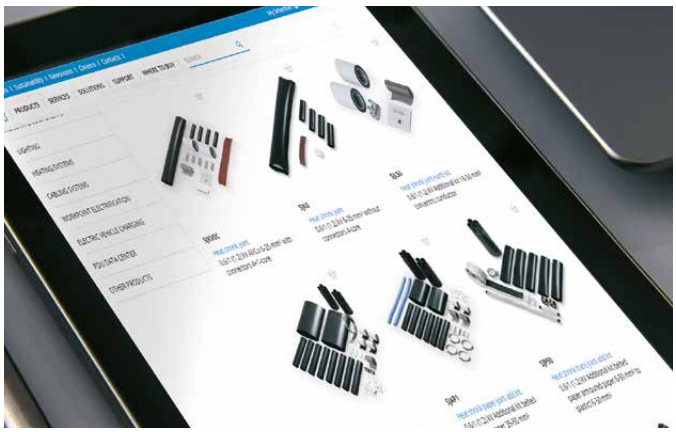

Product information with you everywhere and on any device

Ensto web site includes thorough information about our solutions and detailed data on our products. The product data includes product cards and specifications for individual products.



Installation videos

Installation videos and animations help in installing our products as smooth and easy as possible – where ever, when ever.

› The videos can be found on our YouTube channel “EnstoGroup”. Scan the QR code above to access them directly.



Ensto Pro Training Academy – training for professionals


Ensto Pro is a training program for both Ensto personnel and our customers. It includes theory on e.g. underground cable network construction and effective utilization of Ensto products and solutions. Moreover, the practical installation trainings with tips and best practices are very well-liked among our customers.
To stay in the frontline of the electrical industry we work in close cooperation with various national and international technical schools and universities.

› Contact our sales managers or visit our website for more information.



Tested quality

Our products are tested according to international standards in accredited laboratories. Ensto companies have received ISO 9001 and ISO 14001 quality management certificates. We carry out constant testing in our own laboratory in order to guarantee the quality of our products.

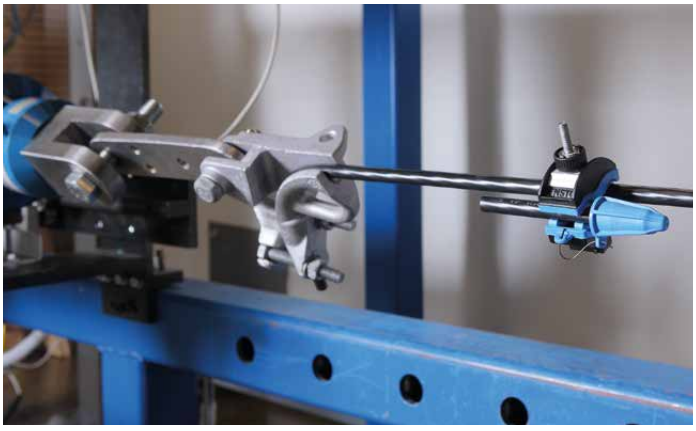

Ensto Pro
TRAINING ACADEMY



Ensto Pro is our technical training concept targeted to customers, partners and own personnel. The aim is **to support sales and create loyal customer relations** by sharing knowledge.


As our customer you gain these benefits from Ensto Pro training

- Time, cost, and energy savings
- Fewer installation errors
- Confidence and motivation
- The opportunity to have an influence
- New perspectives.

Better life.
With electricity.

Ensto Pro Training Academy

Assuring Know-How and Reliable Installations

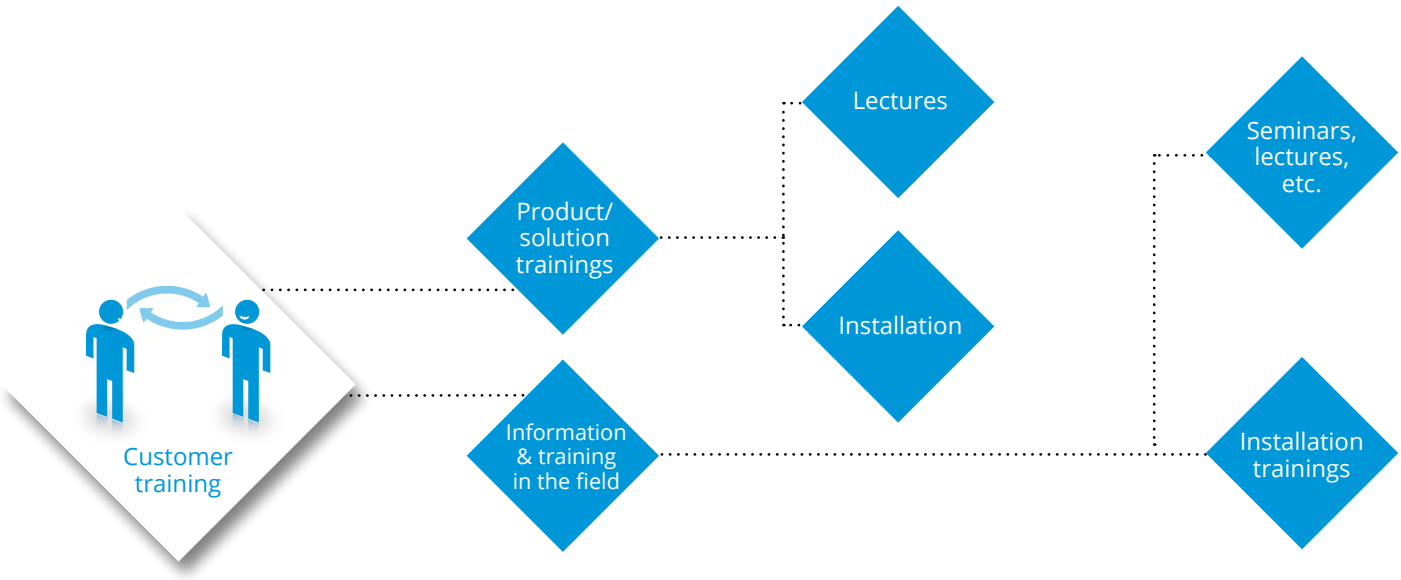

Ensto Pro – and You Know!

Our Knowledge at Your Disposal

Customer training sessions are a vital part of our operations. We offer more than products: a complete package with reliable solutions, professional service, and customized support. They allow us to create profitable, long-term relationship of true collaboration.

Ensto has offered technical training to customers for decades. We want to share with you our 60-year experience in electricity network building and making the most of our products in varied, demanding circumstances. At the same time, we wish to learn from your experiences and truly understand your requirements, thereby becoming able to develop our products to best meet those precise needs.

Unique and Customized Training

Training helps to create true connection between us and you, the customer. We get realtime information on what you want, while you can learn about, for instance, products, installation methods, and distribution network design.


Our Ensto Pro service is unique:

- We give local service in the local language.
- We customize all Ensto Pro trainings.
- We are easy-going professionals.
- We enforce our credibility with a consistent and appealing appearance and presentation.
- We emphasize two-way learning.
- We keep our promises.

Variety of Training Types

Our customer training ranges from small installation sessions to large lecture-type events. Also, we are ready to teach about a host of topics as customer needs and wishes dictate.

Often, we arrange, or are involved in, sessions attended by professionals from various institutions, such as cable manufacturers and energy-market authorities. By offering all the necessary information in one session, we save time and energy. We care about your success.

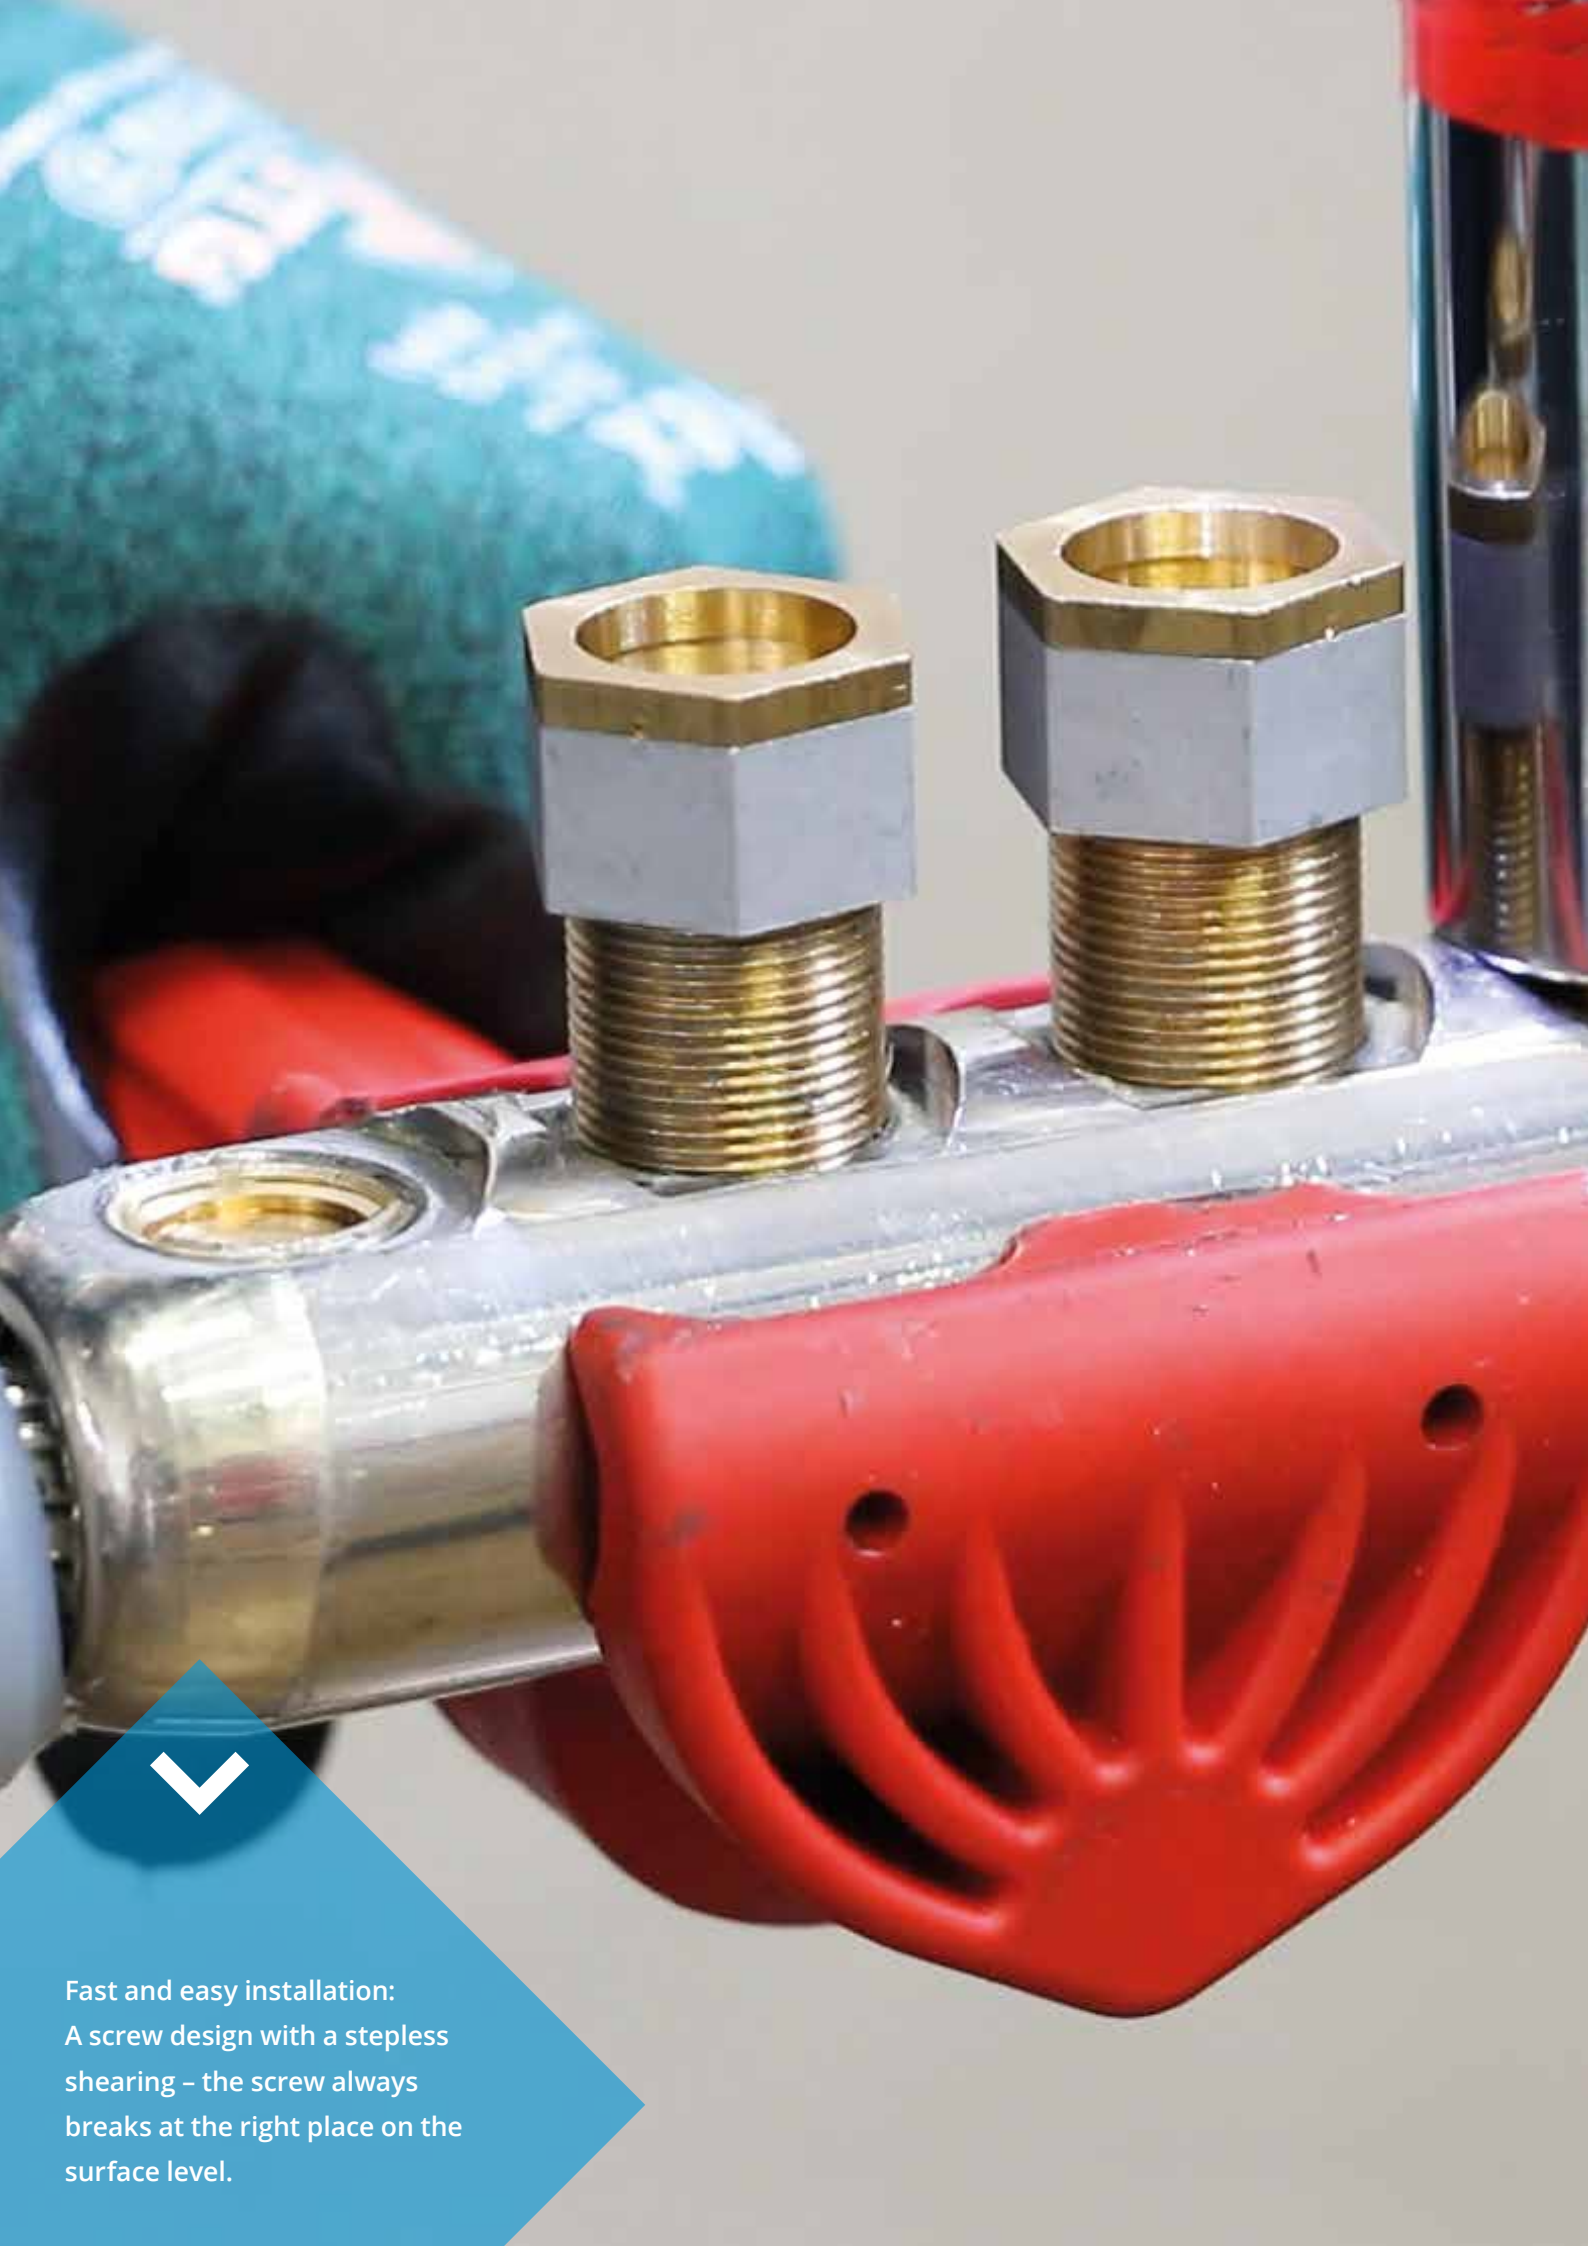

Fast and easy installation:
A screw design with a stepless shearing – the screw always breaks at the right place on the surface level.

Cable lugs and connectors

for a wide range of cross-sections

Our cable lugs and connectors have been designed to make installation as easy and effortless as possible. All our connectors and cable lugs have been equipped with shear-head bolts, which guarantee a reliable and uniform end result without the need for special tools.

LOW



Low voltage

LUG cable lugs and SLJ connectors

- Wide cross-section range: 6–300 mm²
- Wide application range:
  Suitable for solid, stranded, sector and round conductor.
  Suitable for Al and Cu conductors.
- Fast and easy installation:
  Shear head technology – no compression tools.

Medium voltage

LA cable lugs and CA connectors

- Wide cross-section range: 10–800mm²
- Wide application range:
  Suitable for solid, stranded, sector and round conductor.
  Suitable for Al and Cu conductors.
- Fast and easy installation:
  Screw design with step less shearing
  Always correct cut-off point
  No need of hammering or grinding the screw after break.

MEDIUM



Cable lugs and connectors

Low voltage


LOW

Shear head bolt connectors

The connector is used for jointing conductors of cables up to 1 kV. Because of the shear head bolt construction, no crimping tools are needed. The required torque is achieved by tightening the bolt until it breaks off. The connector is longitudinally watertight. It is suitable for aluminium and copper conductors: solid and stranded, sector shaped and circular. The cable core insulation may be plastic or paper.



Product code	GTIN	Conductor size (mm²)	No. of screws	L (mm)	d (mm)	D (mm)	SW (mm)
SLJ0.27	6438100335281	Al 10-35/Cu 4-25	2	40	8	15	7
SLJ0.47	6438100325565	Al 10-35/Cu 4-25	4	50	8	15	7
SLJ1.27	6418677458187	Al/Cu 6-50	2	54	11	20	11
SLJ1.47	6438100306663	Al/Cu 6-50	4	80	11	20	11
SLJ2.27	6418677458194	Al/Cu 35-95	2	58	16	28	14
SLJ2.47	6438100306670	Al/Cu 35-95	4	88	16	28	14
SLJ25.27	6438389016895	Al/Cu 70-150	2	70	19	30	18
SLJ25.47	6438100359225	Al/Cu 95-185	4	110	19	30	18
SLJ3.47	6418677459726	Al/Cu 95-240	4	119	25.5	38	20
SLJ4.47	6418677459733	Al/Cu 150-300	4	130	27.5	43	22



Filler pieces

The filler piece is used together with SLJ shear head bolt connectors, when it is necessary to join conductor sizes smaller than the range of the connector allows. It is suitable for both aluminium and copper conductors.




Product code	GTIN	Description
SLJT2	6438100303211	16-25 mm² SLJ2.27
SLJT25	6438389020953	35-50 mm² SLJ25.27
SLJT3	6438100303228	25-70 mm² SLJ3.47
SLJT4	6438100303235	95-120 mm² SLJ4.47

Shear head bolt cable lugs

The cable lug is used for terminating conductors of cables up to 1 kV. Because of the shear head bolt construction, no crimping tools are needed. The required torque is achieved by tightening the bolt until it breaks off. The lug is longitudinally watertight. It is suitable for aluminium and copper conductors: solid and stranded, sector shaped and circular.



Product code	GTIN	Conductor size (mm²)	L (mm)	W (mm)	d (mm)	D (mm)	Palm hole ø mm	SW (mm)
LUG6-50/8LV	6438100321895	Al 6-50	50	19.5	10	20	8.5	11
LUG6-50/8LVTIN	6438100321901	Al/Cu 6-50	50	19.5	10	20	8.5	11
LUG6-50/10LVTIN	6438100321918	Al/Cu 6-50	50	19.5	10	20	10.5	11
LUG6-50/12LVTIN	6438100321925	Al/Cu 6-50	50	19.5	10	20	12.5	11
LUG50-95/10LV	6438100321932	Al 50-95	73.5	24.5	14.5	25	10.5	14
LUG50-95/10LVTIN	6438100321949	Al/Cu 50-95	73.5	24.5	14.5	25	10.5	14
LUG50-95/12LVTIN	6438100321956	Al/Cu 50-95	73.5	24.5	14.5	25	12.5	14
LUG50-95/14LVTIN	6438100321963	Al/Cu 50-95	73.5	24.5	14.5	25	14.5	14
LUG95-185/12LV	6438100321970	Al 95-185	85	29.5	19	30	12.5	18
LUG95-185/12LVTIN	6438100321987	Al/Cu 95-185	85	29.5	19	30	12.5	18
LUG95-185/14LVTIN	6438100322007	Al/Cu 95-185	85	29.5	19	30	14.5	18
LUG95-185/16LVTIN	6438100321994	Al/Cu 95-185	85	29.5	19	30	16.5	18
LUG150-300/12LV	6438100322014	Al 150-300	113.5	41	25	42	12.5	22
LUG150-300/12LVTIN	6438100322021	Al/Cu 150-300	113.5	41	25	42	12.5	22
LUG150-300/16LVTIN	6438100322038	Al/Cu 150-300	113.5	41	25	42	16.5	22



Cable lugs and connectors

Medium voltage

Shear head bolt cable connector


The connector is used for jointing conductors of cables up to 42 kV. Because of the shear head bolt construction, no crimping tools are needed. The required torque is achieved by tightening the bolt until it breaks off. The connector is longitudinally watertight. It is suitable for aluminium and copper conductors: solid and stranded, sector shaped and circular. The cable core insulation may be plastic or paper.



Product code	GTIN	Conductor size (mm²)	L (mm)	d (mm)	D (mm)	SW (mm)
CA95SB2	6438100361174	Al/Cu 10-95 mm²	70	12.5	24	15
CA150SB4	6438100361129	Al/Cu 25-150 mm²	100	16	28	15
CA240SB4	6438100343910	Al/Cu 50-240 mm²	120	20	33	21
CA300SB4	6438100374280	Al/Cu 95-300 mm²	120	22	35	21
CA400SB4	6438100371029	Al/Cu 185-400 mm²	170	26	43	26
CA630SB6	6438100370961	Al/Cu 300-630 mm²	200	34	52	26

Shear head bolt cable lug

The cable lug is used for terminating conductors of cables up to 42 kV. Because of the shear head bolt construction, no crimping tools are needed. The required torque is achieved by tightening the bolt until it breaks off. The lug is longitudinally watertight. It is suitable for aluminium and copper conductors: solid and stranded, sector shaped and circular.

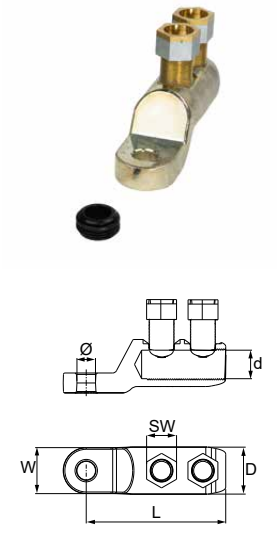

Product code	GTIN	Conductor size (mm²)	L (mm)	W (mm)	d (mm)	D (mm)	Palm hole ø mm	SW (mm)
LA95N13SB1	6438100407452	Al/Cu 10-95 mm²	59	27.5	12.5	24	13	15
LA95N17SB1	6438100405939	Al/Cu 10-95 mm²	59	27.5	17	24	17	15
LA150N13SB2	6438100363109	Al/Cu 25-150 mm²	80.3	28	16	28	13	15
LA150N17SB2	6438100363123	Al/Cu 25-150 mm²	80.3	28	16	28	17	15
LA240N13SB2	6438100358563	Al/Cu 50-240 mm²	97.9	33	20	33	13	21
LA240N17SB2	6438100358570	Al/Cu 50-240 mm²	97.9	33	20	33	17	21
LA300N13SB2	6438100407483	Al/Cu 95-300 mm²	97.9	35	22	35	13	21
LA300N17SB2	6438100407506	Al/Cu 95-300 mm²	97.9	35	22	35	17	21
LA400N13SB2	6438100372392	Al/Cu 185-400 mm²	134	42.9	26	42.9	13	26
LA400N17SB2	6438100372415	Al/Cu 185-400 mm²	134	42.9	26	42.9	17	26
LA630N13SB3	6438100371210	Al/Cu 300-630 mm²	155	50.8	34	52	13	26
LA630N17SB3	6438100371234	Al/Cu 300-630 mm²	155	50.8	34	52	17	26
LA630N21SB3	6438100374150	Al/Cu 300-630 mm²	155	50.8	34	52	21	26



Durability and easy installation are important features in Ensto's underground cable accessories.

Low voltage solutions

Joints and terminations up to 1kV

The share of underground cabling in electricity distribution networks have increased. Under the ground, the cables are protected against the demanding climate which makes the cable network very durable. Ensto's accessories for low voltage underground distribution networks comprise high quality product packages tested according to international standards.



Terminations

- Packages include all components required for terminating a cable.
- Available both with and without shear-head bolt cable lugs.



Cable joints

- Packages include all components required for jointing cables.
- For plastic and paper insulated cables including transition joints.
- Available both with and without shear-head bolt cable connectors.



Heat shrink tubes

- Heat shrink tube manufacturing takes place in our own production facilities in Porvoo, Finland.
- Ensto's own compound recipe is carefully developed and fine-tuned for the highest quality possible.

Low voltage cable accessories

Heat shrink cable joints

SJK heat shrink joint kits

Heat shrink joint for 1 kV cables with Al/Cu conductors, polymeric insulation and polymeric outer sheath. Mechanical connectors are included in the kit. The joint kit include heat shrinkable tubes and all the additional components needed for assembly. The kits are also available without connectors.



Product code	GTIN	Conductor size (mm²) 4 to 4 cores	Conductor size (mm²) 4 to 3+1 cores	Conductor size (mm²) 5 to 5 cores
With connectors				
SJK0C	6438100300944	6-35	6-35	
SJK1C	6418677459740	16-50	16-50	
SJK1.1C	6438100306687	16-50	16-50	
SJK2C	6418677459757	50-95	50-95	
SJK2.1C	6438100306694	50-95	50-95	
SJK25C	6438389019650	70-150	70-150	
SJK25.1C	6438100391515	95-150	95-150	
SJK3C	6418677459764	95-240	95-240	
SJK4C	6418677459771	150-300	150-300	
SJK4X35C	6438100366490	6-35		
SJK4X50C	6438100366506	16-50		
SJK4X95C	6438100366513	35-95		
SJK4X185C	6438100366476	95-185		
SJK4X240C	6438100354404	95-240		
SJK5X35C	6438100366452			6-35
SJK5X50C	6438100366445			6-50
Without connectors				
SJK4X4	6438389019919	1.5-4		
SJK4X10	6438100381813	4-10		
SJK4X16	6438389019926	6-16		
SJK4X25	6438100381820	16-25		
SJK4X50	6438100381837	16-50		
SJK4X150	6438389019933	50-150		
SJK4X240	6438100381851	95-240		
SJK5X35	6438100373559			6-35

SJKV heat shrink joint kits

Heat shrink joint for 1 kV cables with Al/Cu conductors, polymeric insulation, Cu-wire screen and polymeric outer sheath. Mechanical connectors are included in the kit. The joint kit include heat shrinkable tubes and all the additional components needed for assembly. The kits are also available without connectors.



Product code	GTIN	Conductor size (mm²) 3+1 to 3+1 cores	Conductor size (mm²) 4+1 to 4+1 cores
With connectors			
SJKV0C	6438100301033	10-35	6-35
SJKV1C	6438100301040	25-50	16-50
SJKV2C	6438100301057	70-95	50-95
SJKV3C	6438100301064	120-240	95-240
SJKV4C	6438100301071	185-300	150-300
SJKV4X95C	6438100366414		35-95
SJKV4X240C	6438100366421		95-240
Without connectors			
SJKV3X2	6438100403157	1,5-2,5	
SJK3X4	6438389019858	1,5-4	
SJKV3X10	6438100403164	4-10	
SJKV3X16	6438389019865	6-16	
SJKV3X25	6438100403133	16-25	
SJKV3X50	6438100403126	16-50	
SJKV3X95	6438100403119	25-95	
SJKV3X150	6438389019872	50-150	
SJKV3X240	6438100403140	150-240	

Low voltage cable accessories

Heat shrink cable joints

LOW

SJKA heat shrink joint kits

Heat shrink joint for 1 kV AXAMK cables with Al/Cu conductors, polymeric insulation, Al/Cu-wire screen and polymeric outer sheath. Mechanical connectors are included in the kit. The joint kit include heat shrinkable tubes and all the additional components needed for assembly.



Product code	GTIN	Conductor size (mm²)
SJKA1C	6438389101089	25-50
SJKA2C	6438100402174	50-95
SJKA25C	6438389101096	95-150

SJPK heat shrink transition joint kits

Heat shrink joint for 1 kV belted paper insulated, lead sheathed, armoured, 4 core cable to a polymeric insulated 4 or 3+1 core cable. Mechanical connectors are included in the kit. The joint kit include heat shrinkable tubes and all the additional components needed for assembly.



Product code	GTIN	Conductor size (mm²) 4 paper to 4 polymeric cores	Conductor size (mm²) 4 paper to 3+1 polymeric cores
SJPK1C	6438100318437	6-50	6-50
SJPK2C	6438100318475	50-95	50-95
SJPK3C	6438100318499	95-240	95-240

SJA heat shrink additional kits

Heat shrink additional kit used together with a 1 kV joint kit SJK for jointing of belted paper insulated, lead sheathed, armoured, 3 core cables to a polymeric insulated 4 cables. The additional kit include heat shrinkable tubes and all the additional components needed for assembly.



Product code	GTIN	Conductor size (mm²)	Basic kit
SJA1	6418677445675	16-50	SJK1C
SJA2	6418677445682	50-95	SJK2C
SJA3	6418677445699	95-240	SJK3C

SJAP heat shrink additional kits

Heat shrink additional kit used together with the 1 kV joint kit SJK for jointing of belted paper insulated, aluminium sheathed, 3 core cables (e.g. APAKM). The additional kit include heat shrinkable tubes and all the additional components needed for assembly.



Product code	GTIN	Conductor size (mm²)	Basic kit
SJAP1	6418677452567	35-50	SJK1C
SJAP2	6418677452574	50-95	SJK2C
SJAP3	6418677452581	95-240	SJK3C

Low voltage cable accessories

Heat shrink cable joints

SJK heat shrink joint kits

Heat shrink joint for 1 kV cables with Al/Cu conductors, polymeric insulation and polymeric outer sheath. Mechanical connectors are included in the kit. The joint kit include heat shrinkable tubes and all the additional components needed for assembly. The kits are also available without connectors.



Product code	GTIN	Conductor size (mm²) 4 to 4 cores	Conductor size (mm²) 4 to 3+1 cores	Conductor size (mm²) 5 to 5 cores
With connectors				
SJK0C	6438100300944	6-35	6-35	
SJK1C	6418677459740	16-50	16-50	
SJK1.1C	6438100306687	16-50	16-50	
SJK2C	6418677459757	50-95	50-95	
SJK2.1C	6438100306694	50-95	50-95	
SJK25C	6438389019650	70-150	70-150	
SJK25.1C	6438100391515	95-150	95-150	
SJK3C	6418677459764	95-240	95-240	
SJK4C	6418677459771	150-300	150-300	
SJK4X35C	6438100366490	6-35		
SJK4X50C	6438100366506	16-50		
SJK4X95C	6438100366513	35-95		
SJK4X185C	6438100366476	95-185		
SJK4X240C	6438100354404	95-240		
SJK5X35C	6438100366452			6-35
SJK5X50C	6438100366445			6-50
Without connectors				
SJK4X4	6438389019919	1.5-4		
SJK4X10	6438100381813	4-10		
SJK4X16	6438389019926	6-16		
SJK4X25	6438100381820	16-25		
SJK4X50	6438100381837	16-50		
SJK4X150	6438389019933	50-150		
SJK4X240	6438100381851	95-240		
SJK5X35	6438100373559			6-35

SJKV heat shrink joint kits

Heat shrink joint for 1 kV cables with Al/Cu conductors, polymeric insulation, Cu-wire screen and polymeric outer sheath. Mechanical connectors are included in the kit. The joint kit include heat shrinkable tubes and all the additional components needed for assembly. The kits are also available without connectors.



Product code	GTIN	Conductor size (mm²) 3+1 to 3+1 cores	Conductor size (mm²) 4+1 to 4+1 cores
With connectors			
SJKV0C	6438100301033	10-35	6-35
SJKV1C	6438100301040	25-50	16-50
SJKV2C	6438100301057	70-95	50-95
SJKV3C	6438100301064	120-240	95-240
SJKV4C	6438100301071	185-300	150-300
SJKV4X95C	6438100366414		35-95
SJKV4X240C	6438100366421		95-240
Without connectors			
SJKV3X2	6438100403157	1,5-2,5	
SJK3X4	6438389019858	1,5-4	
SJKV3X10	6438100403164	4-10	
SJKV3X16	6438389019865	6-16	
SJKV3X25	6438100403133	16-25	
SJKV3X50	6438100403126	16-50	
SJKV3X95	6438100403119	25-95	
SJKV3X150	6438389019872	50-150	
SJKV3X240	6438100403140	150-240	

Low voltage cable accessories

Heat shrink cable joints

SJKA heat shrink joint kits

Heat shrink joint for 1 kV AXAMK cables with Al/Cu conductors, polymeric insulation, Al/Cu-wire screen and polymeric outer sheath. Mechanical connectors are included in the kit. The joint kit include heat shrinkable tubes and all the additional components needed for assembly.



Product code	GTIN	Conductor size (mm²)
SJKA1C	6438389101089	25-50
SJKA2C	6438100402174	50-95
SJKA25C	6438389101096	95-150

SJPK heat shrink transition joint kits

Heat shrink joint for 1 kV belted paper insulated, lead sheathed, armoured, 4 core cable to a polymeric insulated 4 or 3+1 core cable. Mechanical connectors are included in the kit. The joint kit include heat shrinkable tubes and all the additional components needed for assembly.



Product code	GTIN	Conductor size (mm²) 4 paper to 4 polymeric cores	Conductor size (mm²) 4 paper to 3+1 polymeric cores
SJPK1C	6438100318437	6-50	6-50
SJPK2C	6438100318475	50-95	50-95
SJPK3C	6438100318499	95-240	95-240

SJA heat shrink additional kits

Heat shrink additional kit used together with a 1 kV joint kit SJK for jointing of belted paper insulated, lead sheathed, armoured, 3 core cables to a polymeric insulated 4 cables. The additional kit include heat shrinkable tubes and all the additional components needed for assembly.



Product code	GTIN	Conductor size (mm²)	Basic kit
SJA1	6418677445675	16-50	SJK1C
SJA2	6418677445682	50-95	SJK2C
SJA3	6418677445699	95-240	SJK3C

SJAP heat shrink additional kits

Heat shrink additional kit used together with the 1 kV joint kit SJK for jointing of belted paper insulated, aluminium sheathed, 3 core cables (e.g. APAKM). The additional kit include heat shrinkable tubes and all the additional components needed for assembly.



Product code	GTIN	Conductor size (mm²)	Basic kit
SJAP1	6418677452567	35-50	SJK1C
SJAP2	6418677452574	50-95	SJK2C
SJAP3	6418677452581	95-240	SJK3C


Low voltage cable accessories

Cable breakouts and end caps

SBO heat shrink cable breakouts

Heat shrink cable breakouts are used to protect the terminated cable ends against moisture and dirt. The breakouts are suitable for both polymeric and belted paper insulated 1 kV cables. They are UV resistant and with adhesive. The colour is black.






Product code	GTIN	No of cores	D expanded / recovered (mm)	D1 expanded / recovered (mm)	L (mm)	L1 (mm)	Final wall thickness (mm)	Conductor size (mm^2)
SBO2.1	6418677442865	2	33/10	14/3	90	20	2.0	2x6-35
SBO2.2	6418677442872	2	60/22	24/7	120	35	3.0	2x50-95
SBO3.1	6418677442889	3	38/14	15/4	110	20	1.5	3x6-50
SBO3.3	6418677442896	3	60/22	26/8	185	45	3.0	3x50-120
SBO3.4	6418677442902	3	80/33	36/16	210	50	3.0	3x150-240
SBO3.5	6418677442919	3	110/47	48/20	225	75	3.0	3x240-300
SBO3.6	6418677442926	3	140/54	62/27	240	65	3.0	
SBO3.7	6438100404734	3	170/77	75/28	270	68	3.0	
SBO4.1	6418677442933	4	50/14	15/4	105	25	1.5	4x6-70
SBO4.2	6418677442940	4	55/25	20/6	180	45	3.0	4x50-120
SBO4.3	6418677442957	4	72/22	25/9	190	45	3.0	4x70-240
SBO4.4	6418677442964	4	100/33	35/14	215	50	3.0	4x120-300
SBO5.1	6438100306618	5	50/15	15/4	105	30	2.0	5x6-70
SBO5.3	6438100306632	5	80/33	27/9	215	50	3.0	5x70-240
SBO5.4	6438100306649	5	100/42	34/10	195	55	3.0	5x120-300

SEC heat shrink cable end caps

Heat shrink cable end caps are used to protect the cable ends against moisture and dirt. The end caps are useful especially when cables are stored outdoors. The caps are suitable for both polymeric and belted paper insulated 1 kV cables as well as for telecommunication cables. They are UV resistant and with adhesive. The colour is black.





Product code	GTIN	D expanded / recovered (mm)	L (mm)	Final wall thickness (mm)	Conductor size (mm^2)
SEC1.1	6418677442797	15/5	45	2.0	4x1.5-2.5
SEC1.2	6418677442803	25/9	70	3.0	4x1.5-16
SEC1.3	6418677442810	40/15	102	3.0	4x6-50
SEC1.4	6418677442827	63/24	118	4.0	4x25-150
SEC1.5	6418677442834	75/32	133	4.0	4x70-300
SEC1.6	6418677442841	106/45	164	4.0	4x185-300
SEC1.7	6418677442858	120/57	155	4.0	4x300


Low voltage cable accessories

Cable breakouts and end caps

CSBO cold shrink cable breakouts

Cold shrink cable breakouts are used to protect the terminated cable ends against moisture and dirt. The breakouts are suitable for both polymeric and belted paper insulated 1 kV cables. They are UV resistant. The colour is grey.






Product code	GTIN	No of cores	D expanded / recovered (mm)	D1 expanded / recovered (mm)	L (mm)	L1 (mm)	Conductor size (mm²)
CSBO4.1	6438100354428	4	45/26	14/10	126	35	4x50-95
CSBO4.2	6438100362645	4	63/36	17/12	137	40	4x95-185
CSBO4.3	6438100362652	4	75/51	25/14	145	40	4x185-300
CSBO4.4	6438100362669	4	92/56	40/19	160	40	4x240-300

CSEC cold shrink cable end caps

Cold shrink cable end caps are used to protect the cable ends against moisture and dirt. The end caps are useful especially when cables are stored outdoors. The caps are suitable for both polymeric and belted paper insulated 1 kV cables as well as for telecommunication cables. They are UV resistant. The colour is black.





Product code	GTIN	D expanded / recovered (mm)	L (mm)	Conductor size (mm²)
CSEC1.1	6438100360696	16/13	100	
CSEC1.2	6438100360702	24/18	100	4x16
CSEC1.3	6438100360719	48/25	100	4x25-120
CSEC1.4	6438100360726	70/48	100	4x185-300

Low voltage cable accessories

Medium and heavy wall heat shrink tubes

LOW

CPEEL medium wall heat shrink tubes with adhesive

Medium wall heat shrink tubes are used for insulation and outer protection for 1 kV cables. The tubes are UV resistant and halogen free. The colour is black.



Product code	GTIN	Length (mm)	D expanded / recovered (mm)	Final wall thickness (mm)
CPEEL12-3	6418677417122	1000	12/3	1.5
CPEEL19-6	6418677442506	1000	19/6	1.5
CPEEL30-8	6418677442513	1000	30/8	2.0
CPEEL40-12	6418677417153	1000	40/12	2.0
CPEEL50-16	6418677442520	1000	50/16	2.0
CPEEL63-19	6418677417177	1000	63/19	2.5
CPEEL75-22	6418677437991	1000	75/22	3.0
CPEEL95-30	6418677442537	1000	95/30	3.3
CPEEL115-34	6418677442544	1000	115/34	3.3

CPEEPL heavy wall heat shrink tubes with adhesive

Heavy wall heat shrink tubes are used for insulation and outer protection for 1 kV cables. The tubes are UV resistant and halogen free. The colour is black.



Product code	GTIN	Length (mm)	D expanded / recovered (mm)	Final wall thickness (mm)
CPEEPL16-4	6438389021516	1000	18/4	2.0
CPEEPL19-6	6418677442643	1000	23/6	2.0
CPEEPL33-8	6418677417337	1000	33/8	3.1
CPEEPL45-12	6418677417344	1000	45/12	4.3
CPEEPL51-16	6418677442650	1000	51/16	4.3
CPEEPL68-20	6438389101249	1000	68/19	4.3
CPEEPL85-25	6418677442674	1000	85/25	4.3
CPEEPL105-30	6438389020472	1000	105/30	4.3
CPEEPL130-36	6418677442681	1000	130/34	4.3
CPEEPL140-42	6438100314521	1000	140/42	4.3
CPEEPL165-50	6418677442698	1000	165-50	4.3
CPEEPL185-50	6438389101256	1000	185-50	4.3

Medium voltage solutions

Joints and terminations for up to 42kV







An underground cable network is relatively maintenance free and has a long service life. Ensto's solutions for underground distribution networks offer functional and reliable medium voltage accessories with both heat and cold shrink technologies. Moreover, our hybrid joints and terminations are an effective and durable combination of both technologies. The products have been tested according to international standards. Clear installation instructions help in achieving a uniform and reliable end result.


Heat shrink accessories

Ensto heat shrink products cover 12–36kV indoor and outdoor terminations and joints. The selection includes separate accessories for both plastic and paper insulated cables and for transition joints. The packages contain all components required in a cable termination or joint. The stress control tube and the insulating sleeve are combined in the joints. This reduces the number of components and makes installation work quicker.



Cable joints

- Dual layer stress control technology in 24kV solutions.
- Packages available both with and without connectors.

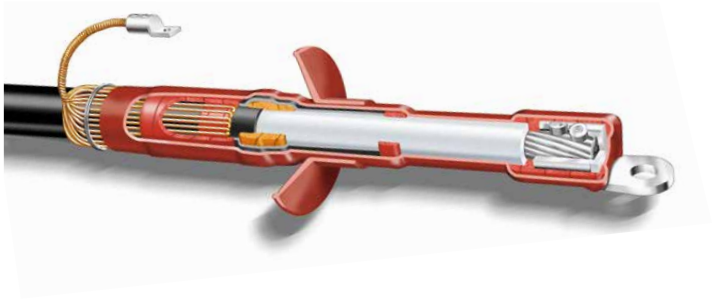

Terminations

- Easily shrinkable stress control tube.
- Reliable, conventional structure.
- Stress control using a separate tube for good and uniform shrinkage – especially in tight spaces.


Cold shrink and hybrid accessories

Cold shrink accessories enable working in places where hot work permits are difficult to obtain or where hot work is otherwise not possible. E.g. oil refineries, many chemical plants and other industrial facilities tend to favour work methods that do not require hot work. The hybrid joints, on the other hand, are a carefully selected combination of cold and heat shrink components that together ensure a durable joint.
Ensto's hybrid joints, cold shrink terminations and separable connectors have multiple uses and a wide range of applications can be covered fully with only a small number of products. The installation work is fast because there are only a few work steps. The packages contain all components required in terminating or jointing cables.



Cable joints

- Spiral technology: quick and easy to install.
- Cold shrink and hybrid joints.
- All-in-one joints.

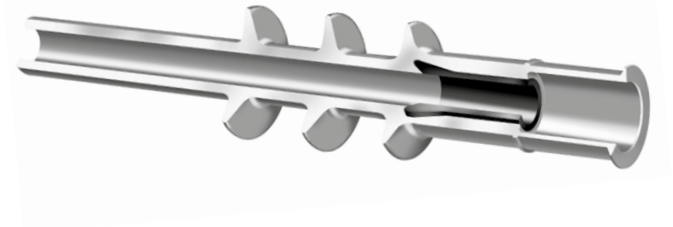

Cable terminations

- One termination tube combining stress control, rainsheds and antitracking tube.
- Spiral technology.
- Ready for use right after the installation.
- Indoor and outdoor terminations.



Screened Separable Connectors

- For installing plastic cables (12 and 24kV) for transformers, motors, and especially SF6 switchgears both indoors and outdoors.
- Installation is quick and easy.

Product assortment »

Medium voltage cable accessories

Heat shrink cable joints

Heat shrink joints

HJW11 joint kits AHXAMK-W

The joint kit is used for jointing of max. 24 kV cables with XLPE insulation and aluminium tape shield. The kit is suitable for AHXAMK-W cables, containing the components for three cores.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV
24 kV without connectors			
HJW11.2402	6418677446993	Al/Cu 50-120	Al/Cu 25-95
HJW11.2403	6418677447006	Al/Cu 120-240	Al/Cu 95-240
HJW11.2404	6418677447013	Al/Cu 240-300	Al/Cu 150-300
24 kV with connectors			
HJW11.2402C	6418677447051	Al/Cu 50-95	Al/Cu 25-95
HJW11.2403C	6418677447068	Al/Cu 120-240	Al/Cu 70-240
HJW11.2404C	6418677447075	Al/Cu 240-300	Al/Cu 150-300

HJ11 joint kits 1 core XLPE

The joint kit is used for jointing of medium voltage cables with XLPE insulation and copper wire shield. The kit is suitable for single core cables and it contains the components for one core.



Product code	GTIN	Conductor size mm²
12 kV without connectors		
HJ11.1201	6418677444715	Al/Cu 10-95
HJ11.1202	6418677444739	Al/Cu 35-95
HJ11.1203	6418677444753	Al/Cu 95-240
HJ11.1204	6418677444777	Al/Cu 150-300
HJ11.1205	6418677444791	Al/Cu 400-630
HJ11.1206	6418677444814	Al/Cu 800-1000
12 kV with connectors		
HJ11.1201C	6418677444722	Al/Cu 10-95
HJ11.1202C	6418677444746	Al/Cu 35-95
HJ11.1203C	6418677444760	Al/Cu 95-240
HJ11.1204C	6418677444784	Al/Cu 150-300
HJ11.1205C	6418677444807	Al/Cu 400-630
HJ11.1206C	6418677444821	Al/Cu 800-1000
24 kV without connectors		
HJ11.2402	6418677444852	Al/Cu 25-95
HJ11.2403	6418677444876	Al/Cu 95-240
HJ11.2404	6418677444890	Al/Cu 150-300
HJ11.2405	6418677444913	Al/Cu 400-630
HJ11.2406	6418677448492	Al/Cu 800-1000
24 kV with connectors		
HJ11.2402C	6418677444869	Al/Cu 25-95
HJ11.2403C	6418677444883	Al/Cu 95-240
HJ11.2404C	6418677444906	Al/Cu 150-300
HJ11.2405C	6418677444920	Al/Cu 400-630
HJ11.2406C	6418677448508	Al/Cu 800-1000
36 kV without connectors		
HJ11.3601	6418677444937	Al/Cu 25-95
HJ11.3602	6418677444951	Al/Cu 95-150
HJ11.3603	6418677444975	Al/Cu 150-300
HJ11.3604	6418677444999	Al/Cu 400-630
HJ11.3605	6418677453458	Al/Cu 800-1000
36 kV with connectors		
HJ11.3601C	6418677444944	Al/Cu 25-95
HJ11.3602C	6418677444968	Al/Cu 95-150
HJ11.3603C	6418677444982	Al/Cu 150-300
HJ11.3604C	6418677445002	Al/Cu 400-630
HJ11.3605C	6438100309855	Al/Cu 800-1000

Heat shrink cable joints

MEDIUM

HJ33 joint kits 3 core XLPE

The joint kit is used for jointing of medium voltage cables with XLPE insulation and copper wire shield. The kit is suitable for three core cables.



Product code	GTIN	Conductor size mm²
12 kV without connectors		
HJ33.1201	6418677445019	Al/Cu 10-95
HJ33.1202	6418677445033	Al/Cu 35-95
HJ33.1203	6418677445057	Al/Cu 95-240
HJ33.1204	6418677445071	Al/Cu 150-300
12 kV with connectors		
HJ33.1201C	6418677445026	Al/Cu 10-95
HJ33.1202C	6418677445040	Al/Cu 35-95
HJ33.1203C	6418677445064	Al/Cu 95-240
HJ33.1204C	6418677445088	Al/Cu 150-300
24 kV without connectors		
HJ33.2402	6418677445156	Al/Cu 10-95
HJ33.2403	6418677445170	Al/Cu 95-240
HJ33.2404	6418677445194	Al/Cu 150-300
24 kV with connectors		
HJ33.2402C	6418677445163	Al/Cu 10-95
HJ33.2403C	6418677445187	Al/Cu 95-240
HJ33.2404C	6418677445200	Al/Cu 150-300
HJ33.2405C	6418677445224	Al/Cu 185-400
36 kV without connectors		
HJ33.3601	6418677445231	Al/Cu 25-95
HJ33.3602	6418677445255	Al/Cu 95-150
HJ33.3603	6418677445279	Al/Cu 120-300
HJ33.3604	6418677445293	Al/Cu 185-400
36 kV with connectors		
HJ33.3601C	6418677445248	Al/Cu 25-95
HJ33.3602C	6418677445262	Al/Cu 95-150
HJ33.3603C	6418677445286	Al/Cu 120-300
HJ33.3604C	6418677445309	Al/Cu 185-400

HJP11 joint kits 3 core paper

The joint kit is used for jointing of medium voltage cables with paper insulation and individual lead or aluminium sheaths. The kit is suitable for three core cables, both armoured and non-armoured.



Product code	GTIN	Conductor size mm²
24 kV without connectors		
HJP11.2402	6418677449321	Al/Cu 35-95
HJP11.2403	6418677449222	Al/Cu 95-240
24 kV with connectors		
HJP11.2402C	6418677449338	Al/Cu 35-95
HJP11.2403C	6418677449239	Al/Cu 95-240

HJHP33 joint kits 3 core H-paper

The joint kit is used for jointing of max. 24 kV three core cables with screened paper insulation, lead sheath and armour.



Product code	GTIN	Conductor size mm²
24 kV without connectors		
HJHP33.2402	6418677455322	Al/Cu 35-95
HJHP33.2403	6418677455346	Al/Cu 95-240
24 kV with connectors		
HJHP33.2402C	6418677455315	Al/Cu 35-95
HJHP33.2403C	6418677455339	Al/Cu 95-240

Medium voltage cable accessories

Heat shrink cable joints

HJP33 joint kits 3 core belted paper

The joint kit is used for jointing of medium voltage cables with belted paper insulation and lead or aluminium sheath. The kit is suitable for three core cables, both armoured and non-armoured.



Product code	GTIN	Conductor size mm²
12 kV without connectors		
HJP33.1202	6418677447365	Al/Cu 50-95
HJP33.1203	6418677447389	Al/Cu 95-240
HJP33.1204	6438100306441	Al/Cu 150-300
12 kV with connectors		
HJP33.1202C	6418677447372	Al/Cu 50-70
HJP33.1203C	6418677447396	Al/Cu 95-185
HJP33.1204C	6438100306458	Al/Cu 150-240

HJTW11 transition joint kits 3 core paper to AHAXMK-W

The joint kit is used for jointing of paper insulated max. 24 kV cables with individual metal sheaths to AHXAMK-W cables. The kit suits for unarmoured paper insulated cables as it is. For armoured paper insulated cables an additional kit SJEW20 is needed.



Product code	GTIN	Conductor size mm²
24 kV without connectors		
HJTW11.2402	6418677449192	Al/Cu 50-95
HJTW11.2403	6418677449178	Al/Cu 95-240
HJTW11.2404	6418677450679	Al/Cu 185-300
24 kV with connectors		
HJTW11.2402C	6418677449208	Al/Cu 50-95
HJTW11.2403C	6418677449185	Al/Cu 95-240
HJTW11.2404C	6418677450686	Al/Cu 185-300
Additional earthing kit for armoured paper insulated cable		
SJEW20	6418677449161	Al/Cu 35-300

HJT11 transition joint kits 3 core paper to 1 core XLPE

The joint kit is used for jointing of max. 24 kV three core cables with paper insulation and individual lead or aluminium sheaths, armoured or non armoured, to single core cables with XLPE insulation and copper wire shield.



Product code	GTIN	Conductor size mm²
24 kV without connectors		
HJT11.2402	6438100300258	Al/Cu 50-95
HJT11.2403	6438100300272	Al/Cu 95-240
HJT11.2404	6438100300296	Al/Cu 185-300
24 kV with connectors		
HJT11.2402C	6438100300265	Al/Cu 50-95
HJT11.2403C	6438100300289	Al/Cu 95-240
HJT11.2404C	6438100300302	Al/Cu 185-300

HJT13 transition joint kits 3 core paper to 3 core XLPE

The joint kit is used for jointing of max. 24 kV three core cables with paper insulation and individual lead or aluminium sheaths, armoured or non armoured, to three core cables with XLPE insulation and copper wire shield.



Product code	GTIN	Conductor size mm²
24 kV without connectors		
HJT13.2402	6438100304027	Al/Cu 50-95
HJT13.2403	6438100304041	Al/Cu 95-240
HJT13.2404	6438100304065	Al/Cu 185-300
24 kV with connectors		
HJT13.2402C	6438100304034	Al/Cu 50-95
HJT13.2403C	6438100304058	Al/Cu 95-240
HJT13.2404C	6438100304072	Al/Cu 185-300

Heat shrink cable joints

MEDIUM

HJHT31 transition joint kits 3 core H-paper to 1 core XLPE

The joint kit is used for jointing of max. 24 kV three core cables with screened paper insulation, lead sheath and armour to single core cables with XLPE insulation and copper wire shield.



Product code	GTIN	Conductor size mm²
24 kV without connectors		
HJHT31.2402	6418677455209	Al/Cu 25-95
HJHT31.2403	6418677455223	Al/Cu 95-240
24 kV with connectors		
HJHT31.2402C	6418677455193	Al/Cu 35-95
HJHT31.2403C	6418677455216	Al/Cu 95-240

HJHT33 transition joint kits 3 core H-paper to 3 core XLPE

The joint kit is used for jointing of max. 24 kV three core cables with screened paper insulation, lead sheath and armour to three core cables with XLPE insulation and copper wire shield.



Product code	GTIN	Conductor size mm²
24 kV without connectors		
HJHT33.2402	6418677455247	Al/Cu 35-95
HJHT33.2403	6418677455261	Al/Cu 95-240
24 kV with connectors		
HJHT33.2402C	6418677455230	Al/Cu 35-95
HJHT33.2403C	6418677455254	Al/Cu 95-240

HJT31 transition joint kits 3 core belted paper to 1 core XLPE

The joint kit is used for jointing of medium voltage three core cables with belted paper insulation and lead or aluminium sheath, either armoured or non-armoured, to single core cables with XLPE insulation and copper wire or tape shield. When jointing to an AHXAMK-W cable an additional earthing kit SJEW10 is required.



Product code	GTIN	Conductor size mm²
12 kV without connectors		
HJT31.1202	6418677447402	Al/Cu Paper 50-95 - XLPE 35-95
HJT31.1203	6418677447426	Al/Cu Paper 95-240 - XLPE 95-240
HJT31.1204	6418677458989	Al/Cu Paper 150-300 - XLPE 150-300
12 kV with connectors		
HJT31.1202C	6418677447419	Al/Cu Paper 50-70 - XLPE 35-95
HJT31.1203C	6418677447433	Al/Cu Paper 95-185 - XLPE 95-240
HJT31.1204C	6418677458972	Al/Cu Paper 150-240 - XLPE 150-300
Additional earthing kit for AHXAMK-W		
SJEW10	6418677449154	Al/Cu 35-240

HJT33 transition joint kits 3 core belted paper to 3 core XLPE

The joint kit is used for jointing of medium voltage three core cables with belted paper insulation and lead or aluminium sheath, either armoured or non-armoured, to three core cables with XLPE insulation and copper wire shield.



Product code	GTIN	Conductor size mm²
12 kV without connectors		
HJT33.1202	6418677453267	Al/Cu Paper 50-95 - XLPE 35-95
HJT33.1203	6418677452260	Al/Cu Paper 95-240 - XLPE 95-240
HJT33.1204	6418677459009	Al/Cu Paper 150-300 - XLPE 150-300
12 kV with connectors		
HJT33.1202C	6418677453274	Al/Cu Paper 50-70 - XLPE 35-95
HJT33.1203C	6418677452253	Al/Cu Paper 95-185 - XLPE 95-240
HJT33.1204C	6418677458996	Al/Cu Paper 150-240 - XLPE 150-300

Medium voltage cable accessories

Heat shrink cable joints

HJU33 joint kits universal cables

The joint kit is used for jointing of max. 24 kV three core universal cables EXCEL, FXCEL and AXCES without tensioning.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV
HJU33.2401	6418677450754	10-16	10-16
HJU33.2402	6418677450761	70-95	70-95

HJ33 PVC heat shrink joint

The joint kit is used for jointing of max. 7,2 kV cables with PVC insulation and copper wire shield. The kit is suitable for three core cables.



Product code	GTIN	Conductor size mm²
HJ33.0602C	6438100313470	Al/Cu 35-95
HJ33.0603C	6438100313487	Al/Cu 95-240

HJ11_R joint kits 3 core XLPE armoured

The joint kit is used for jointing of max. 12 kV armoured cables with XLPE insulation and copper tape shield. The kit is suitable for single core cables containing the components for one core.



Product code	GTIN	Conductor size mm²
12 kV without connectors		
HJ11.1212R	6438100326944	Al/Cu 35-95
HJ11.1213R	6438100326968	Al/Cu 95-240
HJ11.1214R	6438100326982	Al/Cu 150-300
HJ11.1215R	6438100327002	Al/Cu 400-630
HJ11.1216R	6438100327026	Al/Cu 630-1000
12 kV with connectors		
HJ11.1212RC	6438100326951	Al/Cu 35-95
HJ11.1213RC	6438100326975	Al/Cu 95-240
HJ11.1214RC	6438100326999	Al/Cu 150-300
HJ11.1215RC	6438100327019	Al/Cu 400-630
HJ11.1216RC	6438100327033	Al/Cu 630-1000

HJ33_R joint kits 3 core XLPE armoured

The joint kit is used for jointing of armoured cables with XLPE insulation and copper tape shield on each core. The HJ33 kits for three core cables with steel tape or steel wire armour.



Product code	GTIN	Conductor size mm²
12 kV without connectors		
HJ33.1212R	6438100315696	Al/Cu 35-95
HJ33.1213R	6438100315702	Al/Cu 95-240
HJ33.1214R	6438100315719	Al/Cu 150-300
12 kV with connectors		
HJ33.1212RC	6438100314569	Al/Cu 35-95
HJ33.1213RC	6438100314927	Al/Cu 95-240
HJ33.1214RC	6438100314934	Al/Cu 150-300

SJEW additional kits 3 core XLPE to AHXAMK-W

The additional kit is used when jointing of max. 24 kV 3 core cables with copper wire shield to AHXAMK-W cables HJW11 type basic kit is needed.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV
SJEW42	6418677449345	25-95	25-95
SJEW43	6418677449352	95-300	95-300

Heat shrink and cold shrink cable joints

MEDIUM

SJE additional kits 1 core XLPE to 3 core XLPE

The additional kit is used when jointing of max. 24 kV three core XLPE insulated cables with copper wire shield to single core XLPE insulated cables with copper wire shield. HJ11 type basic kits are needed for SJE42 and SJE43 and a HJ33 type basic kit for SJE44 and SJE45.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV
SJE42	6418677452062	25-95	25-95
SJE43	6418677452079	95-300	95-300
SJE44	6438100300135	25-95	25-95
SJE45	6438100300142	95-300	95-300

Cold shrink joints

CJH11 hybrid joint kits 1 core XLPE with Cu wire shield with heat shrink outer sheath

The joint kit is used for jointing of max. 24 kV cables with XLPE insulation and copper wire shield. The kit is suitable for single core cables, containing the components for one core.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Conductor size mm² 36-42 kV	Min. diameter on the insulation mm
24 kV with connectors (Al/Cu)					
CJH11.2402C	6438100307110	35-95	10-95		13,8
CJH11.2403C	6438100307066	95-240	70-240		18,4
CJH11.2404C	6438100307189	240-300	185-300		25,3
CJH11.24045C	6438100321338	240-400	185-400		25,3
CJH11.2405C	6438100316808	400-630	400-630		31,1
CJH11.2406C	6438100316822	630-1000	630-1000		36,8
42 kV with connectors (Al/Cu)					
CJH11.4202C	6438100308162			10-95	20,7
CJH11.4203C	6438100308186			70-240	25,3
CJH11.4204C	6438100308209			120-300	25,3
CJH11.42045C	6438100324476			185-400	25,3
CJH11.4205C	6438100308209			400-630	31,1
CJH11.4206C	6438100321406			630-1000	36,8

CJWH hybrid joint kits AHXAMK-W with heat shrink outer sheath

The joint kit is used for jointing of max. 24 kV cables with XLPE insulation and copper wire shield. The kit is suitable for AHXAMK-W cable, containing the components for three cores.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Conductor size mm² 36-42 kV	Min. diameter on the insulation mm
24 kV with connectors (Al/Cu)					
CJWH11.2402C	6438100304447	35-95	10-95		13,8
CJWH11.2403C	6438100304454	95-240	70-240		18,4
CJWH11.2404C	6438100304461	185-300	185-300		25,3
CJWH11.2405C	6438100323400	Al/Cu 400-630	Al/Cu 400-630		31
CJWH11.2406C	6438100323424	Al/Cu 800-1000	Al/Cu 800-1000		36.8
42 kV with connectors (Al/Cu)					
CJWH11.4203C	6438100317775			Al/Cu 70-240	25,3
CJWH11.4204C	6438100317782			Al/Cu 120-300	25,3
CJWH11.4205C	6438100321390			Al/Cu 400-630	31
CJWH11.4206C	6438100324759			Al/Cu 630-1000	36,8

Medium voltage cable accessories

Cold shrink cable joints

CJH33 hybrid joint kits 3 core XLPE with Cu wire shield with heat shrink outer sheath

The joint kit is used for jointing of max. 24 kV cables with XLPE insulation and copper wire shield. The kit is suitable for three core cables, containing the components for all three cores.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Min. diameter on the insulation mm
24 kV with connectors (Al/Cu)				
CJH33.2402C	6438100307462	70-95	25-95	16,5
CJH33.2403C	6438100307486	150-240	95-240	22,5
CJH33.2404C	6438100317911	300	185-300	27,5

CJH33 hybrid joint kits 3 core XLPE TT with Cu wire shield with heat shrink outer sheath

The joint kit is used for jointing of medium voltage cables with XLPE insulation and copper wire shield. The kit is suitable for radially water tight (TT) three core cables.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Min. diameter on the insulation mm
24 kV with connectors (Al/Cu)				
CJH33.2402CTT	6438100319670	70-95	25-95	16,5
CJH33.2403CTT	6438100319687	150-240	95-240	22,5

CJ11 joint kits 1 core XLPE with Cu wire shield with silicone outer sheath

The joint kit is used for jointing of max. 24 kV cables with XLPE insulation and copper wire shield. The kit is suitable for single core cables, containing the components for one core.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Conductor size mm² 36-42 kV	Min. diameter on the insulation mm
24 kV with connectors (Al/Cu)					
CJ11.2402C	6438100301095	35-95	10-95		13,8
CJ11.2403C	6438100300548	95-240	70-240		18,4
CJ11.2404C	6438100302979	240-300	185-300		25,3
CJ11.24045C	6438100321376	240-400	185-400		25,3
42 kV with connectors (Al/Cu)					
CJ11.4202C	6438100307691			10-95	19,8
CJ11.4203C	6438100307714			70-240	25,3
CJ11.4204C	6438100307738			120-300	25,3
CJ11.42045C	6438100324803			185-400	31

CJAIO11 All-in-One joint kits for 1 core XLPE with Cu wire

CJAIO11 (AIO) joint kit is used for jointing of medium voltage cables with XLPE insulation with copper wire screen. The kit is suitable for single core cables, containing the components for one core.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Conductor size mm² 36 kV	Min. diameter on the insulation mm
24 kV with connector, 25mm² screen					
CJAIO11.2403C	6438100320782	95-240	70-240		18,4
CJAIO11.2402C	6438100327415	35-95	10-95		13.4
CJAIO11.2404C	6438100327422	240-300	185-300		25.3
CJAIO11.2405C	6438100327439	400-630	400-630		31.1
36 kV with connector, 25mm² screen					
CJAIO11.3602C	6438100327828			25-95	18,4
CJAIO11.3603C	6438100319434			70-240	18,4
CJAIO11.3604C	6438100319748			120-300	25.3
CJAIO11.3605C	6438100319960			400-630	31.1

Cold shrink cable joints

MEDIUM

CJAIOT11 All-in-One transition joint kits 1 core XLPE Cu wire and Al laminate screen to 1 core paper cable with Al or Pb sheath

CJAIOT11 (AIOT) joint kit is used for jointing of medium voltage cables with XLPE insulation with copper wire screen or aluminium laminate shield to paper cable with aluminium or lead sheath. The kit is suitable for single core cables, containing the components for one core.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Min. diameter on the insulation mm
24 kV with connector				
CJAIOT11.2403C	6438100320775	95-240	70-240	18,4

CJAIO11 All-in-One repair joint kits for 1 core XLPE with Cu wire and Al laminate screen

CJAIO11 -REP(AIO) joint kit is used for repairing medium voltage cables with XLPE insulation with copper wire screen or Al laminate shield. Length of repair joint is 1 m and the kit contains the components for one core.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Conductor size mm² 36-42 kV	Min. diameter on the insulation mm
36 kV with connector					
CJAIO11.3603C-REP	6438100316648	95-240	70-240	70-240	18,4

CJAIOW11 All-in-One joint for AHXAMK-W cable

The joint kit is used for jointing of max. 24 kV cables with XLPE insulation and aluminium tape shield. The kit is suitable for AHXAMK-W cables, containing the components for three cores.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Min. diameter on the insulation mm
24 kV with connector				
CJAIOW11.2403C	6438100321154	95-240	70-240	18,4


Medium voltage cable accessories

Heat shrink cable terminations

Heat shrink terminations

HITHW1 indoor termination kits AHXAMK-W

The termination kit is used for indoor terminating of XLPE insulated medium voltage cables with aluminium tape shield, especially in transformer cabinets. The kit is suitable for AHXAMK-W cables, containing the components for three cores.






Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Termination length mm	Shed diameter mm
24 kV without cable lugs					
HITHW1.2402	6438100305758	Al/Cu 50-120	Al/Cu 25-95	420	90
HITHW1.2403	6438100305772	Al/Cu 120-240	Al/Cu 95-240	420	115
HITHW1.2404	6438100305796	Al/Cu 240-300	Al/Cu 150-300	420	115
24 kV with cable lugs					
HITHW1.2402L	6438100305765	Al/Cu 50-95	Al/Cu 25-95	420	90
HITHW1.2403L	6438100305789	Al/Cu 120-240	Al/Cu 95-240	420	115
HITHW1.2404L	6438100305802	Al/Cu 240-300	Al/Cu 150-300	420	115

HIT1 indoor termination kits 1 core XLPE

The termination kit is used for indoor terminating of XLPE insulated medium voltage cables with copper wire shield. The kit is suitable for single core cables, containing components for three cores.






Product code	GTIN	Conductor size mm²	Termination length L mm	Shed diameter mm	No of sheds per phase
12 kV without cable lugs					
HIT1.1201	6418677444074	Al/Cu 10-35	330		
HIT1.1202	6418677444098	Al/Cu 35-95	330		
HIT1.1203	6418677444111	Al/Cu 95-240	330		
HIT1.1204	6418677444135	Al/Cu 150-300	330		
HIT1.1205	6418677444159	Al/Cu 400-630	400		
HIT1.1206	6418677444173	Al/Cu 800-1000	430		
12 kV with cable lugs					
HIT1.1201L	6418677444081	Al/Cu 10-35	330		
HIT1.1202L	6418677444104	Al/Cu 35-95	330		
HIT1.1203L	6418677444128	Al/Cu 95-240	330		
HIT1.1204L	6418677444142	Al/Cu 150-300	330		
HIT1.1205L	6418677444166	Al/Cu 400-630	400		
HIT1.1206L	6418677444180	Al/Cu 800-1000	430		
24 kV without cable lugs					
HIT1.2402	6418677444210	Al/Cu 25-95	420		
HIT1.2403	6418677444234	Al/Cu 95-240	420		
HIT1.2405	6418677444272	Al/Cu 400-630	450	130	1
HIT1.2406	6418677444296	Al/Cu 800-1000	480	130	1
24 kV with cable lugs					
HIT1.2402L	6418677444227	Al/Cu 25-95	420		
HIT1.2403L	6418677444241	Al/Cu 95-240	420		
HIT1.2404L	6418677444265	Al/Cu 150-300	420		
HIT1.2405L	6418677444289	Al/Cu 400-630	450	130	1
HIT1.2406L	6418677444302	Al/Cu 800-1000	480	130	1
36 kV without cable lugs					
HIT1.3601	6418677444319	Al/Cu 25-95	520	115	2
HIT1.3602	6418677444333	Al/Cu 95-150	520	115	2
HIT1.3603	6418677444357	Al/Cu 120-300	520	130	2
HIT1.3604	6418677444371	Al/Cu 400-630	550	130	2
HIT1.3605	6418677453502	Al/Cu 800-1000	580	130	2
36 kV with cable lugs					
HIT1.3601L	6418677444326	Al/Cu 25-95	520	115	2
HIT1.3602L	6418677444340	Al/Cu 95-150	520	115	2
HIT1.3603L	6418677444364	Al/Cu 120-300	520	130	2
HIT1.3604L	6418677444388	Al/Cu 400-630	550	130	2
HIT1.3605L	6438100309862	Al/Cu 800-1000	580	130	2

Heat shrink cable terminations

HIT3 indoor termination kits semi conductive 3 core XLPE


The termination kit is used for indoor terminating of medium voltage cables with XLPE insulation and copper wire shield. The kit is suitable for three core cables. The surface of the lower part of the termination is semi conductive in order to decrease surface discharging in moist conditions.

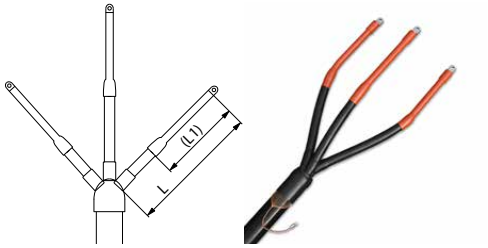

Product code	GTIN	Conductor size mm²	Termination length L mm	Shed diameter mm	No of sheds per phase
12 kV without cable lugs					
HIT3.1211	6438100311490	Al/Cu 10-35	500-1100 (L1 = 330)		
HIT3.1212	6438100311513	Al/Cu 35-95	500-1100 (L1 = 330)		
HIT3.1213	6438100311544	Al/Cu 95-240	500-1100 (L1 = 330)		
HIT3.1214	6438100311568	Al/Cu 150-300	500-1100 (L1 = 330)		
12 kV with cable lugs					
HIT3.1211L	6438100311506	Al/Cu 10-35	500-1100 (L1 = 330)		
HIT3.1212L	6438100311520	Al/Cu 35-95	500-1100 (L1 = 330)		
HIT3.1213L	6438100311551	Al/Cu 95-240	500-1100 (L1 = 330)		
HIT3.1214L	6438100311575	Al/Cu 150-300	500-1100 (L1 = 330)		
24 kV without cable lugs					
HIT3.2412	6438100311582	Al/Cu 10-95	500-1100 (L1 = 380)		
HIT3.2413	6438100311605	Al/Cu 95-240	500-1100 (L1 = 380)		
HIT3.2414	6438100311629	Al/Cu 150-300	500-1100 (L1 = 380)		
24 kV with cable lugs					
HIT3.2412L	6438100311599	Al/Cu 10-95	500-1100 (L1 = 380)		
HIT3.2413L	6438100311612	Al/Cu 95-240	500-1100 (L1 = 380)		
HIT3.2414L	6438100311636	Al/Cu 150-300	500-1100 (L1 = 380)		
36 kV without cable lugs					
HIT3.3611	6438100311643	Al/Cu 25-95	650-1100 (L1 = 380)	115	2
HIT3.3612	6438100311667	Al/Cu 95-150	650-1100 (L1 = 380)	115	2
HIT3.3613	6438100311681	Al/Cu 120-300	650-1100 (L1 = 380)	145	2
36 kV with cable lugs					
HIT3.3611L	6438100311650	Al/Cu 25-95	650-1100 (L1 = 380)	115	2
HIT3.3612L	6438100311674	Al/Cu 95-150	650-1100 (L1 = 380)	115	2
HIT3.3613L	6438100311698	Al/Cu 120-300	650-1100 (L1 = 380)	145	2

HIT31 indoor termination kits 3 to 1 core XLPE

The termination kit is used for indoor terminating of medium voltage three core cables with XLPE insulation and copper wire shield. The kit transfers a three core cable to three single core shielded cables.

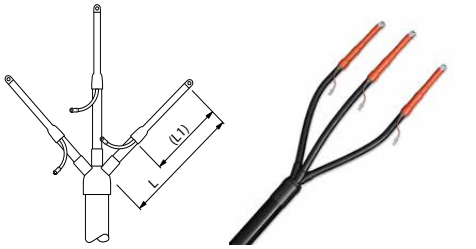

Product code	GTIN	Conductor size mm²	Termination length L mm
12 kV without cable lugs			
HIT31.1202	6438100320423	Al/Cu 35-95	500-2000 (L1 = 330)
HIT31.1203	6438100320447	Al/Cu 95-240	500-2000 (L1 = 330)
12 kV with cable lugs			
HIT31.1202L	6438100320430	Al/Cu 35-95	500-2000 (L1 = 330)
HIT31.1203L	6438100320454	Al/Cu 95-240	500-2000 (L1 = 330)
24 kV without cable lugs			
HIT31.2402	6438100320461	Al/Cu 10-95	500-2000 (L1 = 380)
HIT31.2403	6438100320485	Al/Cu 95-240	500-2000 (L1 = 380)
24 kV with cable lugs			
HIT31.2402L	6438100320478	Al/Cu 10-95	500-2000 (L1 = 380)
HIT31.2403L	6438100320492	Al/Cu 95-240	500-2000 (L1 = 380)

Medium voltage cable accessories

Heat shrink cable terminations

HIT1_R indoor termination kits 1 core XLPE armoured

The termination kit is used for indoor terminating of max. 12 kV armoured cables with XLPE insulation and copper tape shield.






Product code	GTIN	Conductor size mm²	Termination length L mm
12 kV without cable lugs			
HIT1.1212R	6438100327040	Al/Cu 35-95	420
HIT1.1213R	6438100327064	Al/Cu 95-240	420
HIT1.1214R	6438100327088	Al/Cu 150-300	420
HIT1.1215R	6438100327101	Al/Cu 400-630	500
HIT1.1216R	6438100327125	Al/Cu 630-1000	530
12 kV with cable lugs			
HIT1.1212RL	6438100327057	Al/Cu 35-95	420
HIT1.1213RL	6438100315757	Al/Cu 95-240	420
HIT1.1214RL	6438100315764	Al/Cu150-300	420
HIT1.1215RL	6438100327118	Al/Cu 400-630	500
HIT1.1216RL	6438100327132	Al/Cu 630-1000	530

HIT3_R indoor termination kits 3 core XLPE armoured

The termination kit is used for outdoor terminating of armoured cables with XLPE insulation and copper tape shield on each core. The kit is suitable for three core cables. The surface of the lower part of the termination is semi conductive in order to decrease surface discharging in moist conditions.






Product code	GTIN	Conductor size mm²	Termination length L mm
12 kV without cable lugs			
HIT3.1212R	6438100315733	Al/Cu 35-95	500-1100 (L1 = 330)
HIT3.1213R	6438100311544	Al/Cu 95-240	500-1100 (L1 = 330)
HIT3.1214R	6438100315740	Al/Cu 150-300	500-1100 (L1 = 330)
12 kV with cable lugs			
HIT3.1212RL	6438100314941	Al/Cu 35-95	500-1100 (L1 = 330)
HIT3.1213RL	6438100315757	Al/Cu 95-240	500-1100 (L1 = 330)
HIT3.1214RL	6438100315764	Al/Cu 150-300	500-1100 (L1 = 330)

HIT3 indoor termination kits 3 core PVC

The termination kit is used for indoor terminating of max. 7,2 kV cables with PVC insulation and copper wire shield. The kit is suitable for three core cables.






Product code	GTIN	Conductor size mm²	Termination length L mm
7,2 kV without cable lugs			
HIT3.0602	6438100314378	Al/Cu 25-95	500
HIT3.0603	6438100314385	Al/Cu 95-185	500
HIT3.0604	6438100314392	Al/Cu 150-300	500
7,2 kV with cable lugs			
HIT3.0601L	6438100314248	Al/Cu 25-50	500
HIT3.0602L	6438100314255	Al/Cu 50-95	500
HIT3.0603L	6438100314262	Al/Cu 95-185	500
HIT3.0604L	6438100314279	Al/Cu 150-300	500

HITU3 indoor termination kits universal cables

The termination kit is used for indoor terminating of 12-24 kV three core universal cables EXCEL, FXCEL and AXCES.






Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Termination length L mm	Shed diameter mm	No of sheds per phase
12 kV without cable lugs						
HITU3.1201	6418677450693	Al/Cu 10-35		450-1100		
12 kV with cable lugs						
HITU3.1201L	6438100304256	Al/Cu 10-35		450-1100		
24 kV without cable lugs						
HITU3.2401	6418677450709		Al/Cu 10-16	450-1100	90	1
HITU3.2402	6418677450716	Al/Cu 70-95	Al/Cu 70-95	450-1100	90	1
24 kV with cable lugs						
HITU3.2401L	6438100304270		Al/Cu 10-16	450-1100	90	1

Heat shrink cable terminations

MEDIUM

HITP3 indoor termination kits 3 core belted paper

The termination kit is used for indoor terminating of medium voltage cables with belted paper insulation and lead or aluminium sheath. The kit is suitable for three core cables, both armoured and non-armoured.






Product code	GTIN	Conductor size mm²	Termination length L mm
12 kV without cable lugs			
HITP3.1201	6418677447242	25-35	450-1100
HITP3.1202	6418677447266	35-95	450-1100
HITP3.1203	6418677447280	95-240	450-1100
12 kV with cable lugs			
HITP3.1201L	6418677447259	25-35	450-1100
HITP3.1202L	6418677447273	35-70	450-1100
HITP3.1203L	6418677447297	95-185	450-1100

HITHP3 indoor termination kits 3 core H-paper

The termination kit is used for indoor terminating of max. 24 kV three core cables with screened paper insulation, lead sheath and armour.






Product code	GTIN	Conductor size mm²	Termination length L mm	Shed diameter mm	No of sheds per phase
24 kV without cable lugs					
HITHP3.2402	6438100304096	35-95	950-1500	90	1
HITHP3.2403	6438100304119	95-240	950-1500	115	1
24 kV without cable lugs					
HITHP3.2402L	6438100304102	35-95	950-1500	90	1
HITHP3.2403L	6438100304126	95-240	950-1500	115	1

HOT1 outdoor termination kits 1 core XLPE

The termination kit is used for outdoor terminating of XLPE insulated medium voltage cables with copper wire shield. The kit is suitable for single core cables, containing components for three cores.






Product code	GTIN	Conductor size mm²	Termination length L mm	Shed diameter mm	No of sheds per phase
12 kV without cable lugs					
HOT1.1202	6418677443350	Al/Cu 35-95	370	90	1
HOT1.1203	6418677443374	Al/Cu 95-240	370	115	1
HOT1.1204	6418677443398	Al/Cu 150-300	370	115	1
HOT1.1205	6418677443411	Al/Cu 400-630	400	130	1
HOT1.1206	6418677443435	Al/Cu 800-1000	400	130	1
12 kV with cable lugs					
HOT1.1201L	6418677443343	Al/Cu 10-35	330	90	
HOT1.1202L	6418677443367	Al/Cu 35-95	370	90	1
HOT1.1203L	6418677443381	Al/Cu 95-240	370	115	1
HOT1.1204L	6418677443404	Al/Cu 150-300	370	115	1
HOT1.1205L	6418677443428	Al/Cu 400-630	400	130	1
HOT1.1206L	6418677443442	Al/Cu 800-1000	430	130	1
24 kV without cable lugs					
HOT1.2402	6418677443473	Al/Cu 25-95	420	90	3
HOT1.2403	6418677443497	95-240	420	115	3
HOT1.2404	6418677443510	Al/Cu 150-300	420	115	3
HOT1.2405	6418677443534	Al/Cu 400-630	450	130	3
HOT1.2406	6418677443558	Al/Cu 800-1000	480	130	3
24 kV with cable lugs					
HOT1.2402L	6418677443480	Al/Cu 25-95	420	90	3
HOT1.2403L	6418677443503	Al/Cu 95-240	420	115	3
HOT1.2404L	6418677443527	Al/Cu 150-300	420	115	3
HOT1.2405L	6418677443541	Al/Cu 400-630	450	130	3
HOT1.2406L	6418677443565	Al/Cu 800-1000	480	130	3
36 kV without cable lugs					
HOT1.3601	6418677443572	Al/Cu 25-95	520	115	4
HOT1.3602	6418677443596	Al/Cu 95-150	520	130	4
HOT1.3603	6418677443619	Al/Cu 120-300	520	130	4
HOT1.3604	6418677443633	Al/Cu 400-630	550	130	4
HOT1.3605	6418677453496	Al/Cu 800-1000	580	130	4
36 kV with cable lugs					
HOT1.3601L	6418677443589	Al/Cu 25-95	520	130	4
HOT1.3602L	6418677443602	Al/Cu 95-150	520	130	4
HOT1.3603L	6418677443626	Al/Cu 120-300	520	130	4
HOT1.3604L	6418677443640	Al/Cu 400-630	550	130	4

Medium voltage cable accessories

Heat shrink cable terminations

HOTHW1 outdoor termination kits AHXAMK-W

The termination kit is used for outdoor terminating of XLPE insulated medium voltage cables with aluminium tape shield and plastic outer sheath. The kit is suitable for AHXAMK-W cables, containing components for three cores.







Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Termination length L mm	Shed diameter mm	No of sheds per phase
24 kV without cable lugs						
HOTHW1.2402	6438100305833	Al/Cu 50-120	Al/Cu 25-95	420	90	3
HOTHW1.2403	6438100305857	Al/Cu 120-240	Al/Cu 95-240	420	115	3
HOTHW1.2404	6438100305871	Al/Cu 240-300	Al/Cu 150-300	420	115	3
24 kV with cable lugs						
HOTHW1.2402L	6438100305840	Al/Cu 50-95	Al/Cu 25-95	420	90	3
HOTHW1.2403L	6438100305864	Al/Cu 120-240	Al/Cu 95-240	420	115	3
HOTHW1.2404L	6438100305888	Al/Cu 240-300	Al/Cu 150-300	420	115	3

HOT31 outdoor termination kits 3 to 1 core XLPE

The termination kit is used for outdoor terminating of medium voltage three core cables with XLPE insulation and copper wire shield. The kit transfers a three core cable to three single core shielded cables.







Product code	GTIN	Conductor size mm²	Termination length L mm	Shed diameter mm	No of sheds per phase
24 kV without cable lugs					
HOT31.1202	438100320508	Al/Cu 35-95	500-2000 (L1 = 330)	90	1
HOT31.1203	6438100320522	Al/Cu 95-240	500-2000 (L1 = 330)	115	1
HOT31.1202L	6438100320515	Al/Cu 35-95	500-2000 (L1 = 330)	90	1
HOT31.1203L	6438100320539	Al/Cu 95-240	500-2000 (L1 = 330)	115	1
24 kV with cable lugs					
HOT31.2402	6438100320546	Al/Cu 10-95	500-2000 (L1 = 420)	90	3
HOT31.2403	6438100320560	Al/Cu 95-240	500-2000 (L1 = 420)	115	3
HOT31.2402L	6438100320553	Al/Cu 10-95	500-2000 (L1 = 420	90	3
HOT31.2403L	6438100320577	Al/Cu 95-240	500-2000 (L1 = 420)	115	3

HOTU3 outdoor termination kits universal cables

The termination kit is used for outdoor terminating of 12-24 kV three core universal cables EXCEL, FXCEL and AXCES.






Product code	GTIN	Conductor size mm²	Termination length L mm	Shed diameter mm	No of sheds per phase
12 kV without cable lugs					
HOTU3.1201	6418677450723	10-35	450-1100	90	1
12 kV with cable lugs					
HOTU3.1201L	6438100304263	10-35	450-1100	90	1
24 kV without cable lugs					
HOTU3.2401	6418677450730	10-16	450-1100	90	3
HOTU3.2402	6418677450747	70-95	450-1100	90	3
24 kV with cable lugs					
HOTU3.2401L	6438100304287	10-16	450-1100	90	3

Heat shrink cable terminations

MEDIUM

HOT3 outdoor termination kits semi conductive 3 core XLPE

The termination kit is used for outdoor terminating of medium voltage cables with XLPE insulation and copper wire shield. The kit is suitable for three core cables.






Product code	GTIN	Conductor size mm²	Termination length L mm	Shed diameter mm	No of sheds per phase
12 kV without cable lugs					
HOT3.1211	6438100311704	Al/Cu 10-35	500-1400 (L1 = 330)	90	1
HOT3.1212	6438100311728	Al/Cu 35-95	500-1400 (L1 = 330)	90	1
HOT3.1213	6438100311742	Al/Cu 95-240	500-1400 (L1 = 330)	115	1
HOT3.1214	6438100311766	Al/Cu 150-300	500-1400 (L1 = 330)	115	1
12 kV with cable lugs					
HOT3.1211L	6438100311711	Al/Cu 10-35	500-1400 (L1 = 330)	90	1
HOT3.1212L	6438100311735	Al/Cu 35-95	500-1400 (L1 = 330)	90	1
HOT3.1213L	6418677443381	Al/Cu 95-240	500-1400 (L1 = 330)	115	1
HOT3.1214L	6438100311773	Al/Cu 150-300	500-1400 (L1 = 330)	115	1
24 kV without cable lugs					
HOT3.2412	6438100311780	Al/Cu 10-95	500-1400 (L1 = 420)	90	3
HOT3.2413	6438100311803	Al/Cu 95-240	500-1400 (L1 = 420)	115	3
HOT3.2414	6438100311827	Al/Cu 150-300	500-1400 (L1 = 420)	115	3
24 kV with cable lugs					
HOT3.2412L	6438100311797	Al/Cu 10-95	500-1400 (L1 = 420)	90	3
HOT3.2413L	6438100311810	Al/Cu 95-240	500-1400 (L1 = 420)	115	3
HOT3.2414L	6438100311834	Al/Cu 150-300	500-1400 (L1 = 420)	115	3
36 kV without cable lugs					
HOT3.3611	6438100311841	Al/Cu 25-95	650-1400 (L1 = 520)	115	4
HOT3.3612	6438100311865	Al/Cu 95-150	650-1400 (L1 = 520)	115	4
HOT3.3613	6438100311889	Al/Cu 120-300	650-1400 (L1 = 520)	145	4
36 kV with cable lugs					
HOT3.3611L	6438100311858	Al/Cu 25-95	650-1400 (L1 = 520)	115	4
HOT3.3612L	6438100311872	Al/Cu 95-150	650-1400 (L1 = 520)	115	4
HOT3.3613L	6438100311896	Al/Cu 120-300	650-1400 (L1 = 520)	130	4

HOT3 outdoor termination kits 3 core PVC

The termination kit is used for outdoor terminating of max. 7,2 kV cables with PVC insulation and copper wire shield. The kit is suitable for three core cables.






Product code	GTIN	Conductor size mm²	Termination length L mm	Shed diameter mm	No of sheds per phase
7,2 kV without cable lugs					
HOT3.0602	6438100314330	Al/Cu 25-95	500	90	1
HOT3.0603	6438100314347	Al/Cu 95-185	500	115	1
HOT3.0604	6438100314354	Al/Cu 150-300	500	115	1
HOT3.0612	6438100314415	Al/Cu 25-95	1000	90	1
HOT3.0613	6438100314422	Al/Cu 95-185	1000	115	1
HOT3.0614	6438100314439	Al/Cu 150-300	1000	115	1
7,2 kV with cable lugs					
HOT3.0601L	6438100314200	Al/Cu 25-50	500	90	1
HOT3.0602L	6438100314217	Al/Cu 50-95	500	90	1
HOT3.0603L	6438100314224	Al/Cu 95-185	500	115	1
HOT3.0604L	6438100314231	Al/Cu 150-300	500	115	1
HOT3.0611L	6438100314286	Al/Cu 25-50	1000	90	1
HOT3.0612L	6438100314293	Al/Cu 50-95	1000	90	1
HOT3.0613L	6438100314309	Al/Cu 95-185	1000	115	1
HOT3.0614L	6438100314316	Al/Cu 150-300	1000	115	1

Medium voltage cable accessories

Heat shrink cable terminations

HOT1_R outdoor termination kits XLPE armoured

The termination kit is used for outdoor terminating of armoured cables with XLPE insulation and copper tape shield on each core. The HOT1 kits are suitable for single core cables with aluminium wire armour.







Product code	GTIN	Conductor size mm²	Termination length L mm	Shed diameter mm	No of sheds per phase
12 kV without cable lugs					
HOT1.1212R	6438100327149	Al/Cu 35-95	420	90	1
HOT1.1213R	6438100327163	Al/Cu 95-240	420	115	1
HOT1.1214R	6438100327187	Al/Cu 150-300	420	115	1
HOT1.1215R	6438100327200	Al/Cu 400-630	500	145	1
HOT1.1216R	6438100327224	Al/Cu 630-1000	530	145	1
12 kV with cable lugs					
HOT1.1212RL	6438100327156	Al/Cu 35-95	420	90	1
HOT1.1213RL	6438100327170	Al/Cu 95-240	420	115	1
HOT1.1214RL	6438100327194	Al/Cu 150-300	420	115	1
HOT1.1215RL	6438100327217	Al/Cu 400-630	500	145	1
HOT1.1216RL	6438100327231	Al/Cu 630-1000	530	145	1

HOT3_R outdoor termination kits XLPE armoured

The termination kit is used for outdoor terminating of armoured cables with XLPE insulation and copper tape shield on each core. The HOT3 kits are for three core cables with steel tape or steel wire armour.






Product code	GTIN	Conductor size mm²	Termination length L mm	Shed diameter mm	No of sheds per phase
12 kV without cable lugs					
HOT3.1212R	6438100315771	Al/Cu 35-95	500-1400 (L1 = 330)	90	1
HOT3.1213R	6438100315788	Al/Cu 95-240	500-1400 (L1 = 330)	115	1
HOT3.1214R	6438100315795	Al/Cu 150-300	500-1400 (L1 = 330)	115	1
12 kV with cable lugs					
HOT3.1212RL	6438100314958	Al/Cu 35-95	500-1400 (L1 = 330)	90	1
HOT3.1213RL	6438100315139	Al/Cu 95-240	500-1400 (L1 = 330)	115	1
HOT3.1214RL	6438100315146	Al/Cu 150-300	500-1400 (L1 = 330)	115	1

HOTP1 outdoor termination kits 3 core paper

The termination kit is used for indoor and outdoor terminating of max. 24 kV cables with paper insulation and individual lead or aluminium sheaths. The kit is suitable for three core cables, either armoured or non-armoured.






Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Termination length L mm	Shed diameter mm	No of sheds per phase
24 kV without cable lugs						
HOTP1.2401	6418677452024	Al/Cu 70-95	Al/Cu 25-35	min. 750	90	3
HOTP1.2402	6418677452048	Al/Cu 95-150	Al/Cu 50-95	min. 750	90	3
HOTP1.2403	6418677449215	Al/Cu 150-300	Al/Cu 95-240	min. 750	115	3
24 kV with cable lugs						
HOTP1.2401L	6418677452031	Al/Cu 70-95	Al/Cu 25-35	min. 750	90	3
HOTP1.2402L	6418677452055	Al/Cu 95-150	Al/Cu 50-95	min. 750	90	3
HOTP1.2403L	6418677449147	Al/Cu 150-240	Al/Cu 95-240	min. 750	115	3

HOTP3 outdoor termination kits 3 core belted paper

The termination kit is used for outdoor terminating of medium voltage cables with belted paper insulation and lead or aluminium sheath. The kit is suitable for three core cables, either armoured or non-armoured.





Product code	GTIN	Conductor size mm²	Termination length L mm	Shed diameter mm	No of sheds per phase
12 kV without cable lugs					
HOTP3.1201	6418677447303	25-35	650-1300	90	1
HOTP3.1202	6418677447327	35-95	650-1300	90	1
HOTP3.1203	6418677447341	95-240	650-1300	115	1
12 kV with cable lugs					
HOTP3.1201L	6418677447310	25-35	650-1300	90	1
HOTP3.1202L	6418677447334	35-70	650-1300	90	1
HOTP3.1203L	6418677447358	95-185	650-1300	115	1

Cold shrink cable terminations

MEDIUM

CIT1 indoor termination kits 1 core XLPE with Cu wire shield

The termination kit is used for indoor terminating of XLPE insulated medium voltage cables with wire shield. The kit is suitable for single core cables, containing components for three cores.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Termination length mm	Shed diameter mm	No of sheds per phase	Min. diameter on the insulation mm
24 kV with cable lugs (Al/Cu)							
CIT1.2402L	6438100301132	35-95	10-95	265	62	3	13,8
CIT1.2403L	6438100300524	70-240	70-240	270	62	3	18,4
CIT1.2404L	6438100302856	240-300	185-300	310	62	3	25,3
CIT1.24045L	6438100326067	185-400	185-400	370	62	3	31
CIT1.2405L	6438100304744	185-400	400-630	370	62	3	31
CIT1.2406L	6438100312329	630-1000	630-1000	370	62	3	36,8
Additional core sheathing kits							
STE16	6438100306588	70-240	70-240				

Product code	GTIN	Conductor size mm² 36 kV	Conductor size mm² 42 kV	Termination length mm	Shed diameter mm	No of sheds per phase	Min. diameter on the insulation mm
42kV with cable lugs (Al/Cu)							
CIT1.4202L	6438100304805	10-95	10-95	350	100	3	18,4
CIT1.4203L	6438100300500	70-240	70-240	390	100	3	25,3
CIT1.4204L	6438100304812	185-300	185-300	450	100	3	31
CIT1.42045L	6438100326074	185-400	185-400	150	100	3	31
CIT1.4205L	6438100304829	400-630	400-630	450	100	3	31
CIT1.4206L	6438100312381	630-1000	630-1000	450	100	3	36,8

COT1 outdoor termination kits 1 core XLPE with Cu wire shield

The termination kit is used for outdoor terminating of XLPE insulated medium voltage cables with wire shield. The kit is suitable for single core cables, containing components for three cores.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Termination length mm	Shed diameter mm	No of sheds per phase	Min. diameter on the insulation mm
24 kV with cable lugs (Al/Cu)							
COT1.2402L	6438100301118	35-95	10-95	345	100	3	13,8
COT1.2403L	6438100300463	95-240	70-240	350	100	3	18,4
COT1.2404L	6438100302917	240-300	185-300	390	100	3	25,3
COT1.24045L	6438100326081	240-400	185-400	390	100	3	25,3
COT1.2405L	6438100304751	400-630	400-630	450	100	3	31,1
COT1.2406L	6438100312336	630-1000	630-1000	520	100	3	36,8
Additional core sheathing kits							
STE16	6438100306588	70-240	70-240				

Product code	GTIN	Conductor size mm² 36 kV	Conductor size mm²42 kV	Termination length mm	Shed diameter mm	No of sheds per phase	Min. diameter on the insulation mm
42 kV with cable lugs (Al/Cu)							
COT1.4202L	6438100304874	10-95	10-95	620	100	6	18,4
COT1.4203L	6438100300432	70-240	70-240	750	100	6	25,3
COT1.4204L	6438100304881	185-300	185-300	800	100	6	31
COT1.42045L	6438100326098	185-400	185-400	800	100	6	31
COT1.4205L	6438100304898	400-630	400-630	800	100	6	31
COT1.4206L	6438100312398	630-1000	630-1000	800	100	6	36,8

Medium voltage cable accessories

Cold shrink cable terminations

CIT1-ALS indoor termination kits 1 core XLPE with Al tape shield

The termination kit is used for indoor terminating of XLPE insulated medium voltage cables with aluminium tape shield shield. The kit is suitable for single core cables, containing components for three cores.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Termination length mm	Shed diameter mm	No of sheds per phase	Min. diameter on the insulation mm
24 kV with cable lugs (Al/Cu)							
CIT1.2402L-ALS	6438100301149	35-95	10-95	265	62	3	13,8
CIT1.2403L-ALS	6438100300517	95-240	70-240	270	62	3	18,4
CIT1.2404L-ALS	6438100302870	240-300	185-300	310	62	3	25,3

COT1-ALS outdoor termination kits 1 core XLPE with Al tape shield

The termination kit is used for outdoor terminating of XLPE insulated medium voltage cables with aluminium tape shield shield. The kit is suitable for single core cables, containing components for three cores.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Termination length mm	Shed diameter mm	No of sheds per phase	Min. diameter on the insulation mm
24 kV with cable lugs (Al/Cu)							
COT1.2402L-ALS	6438100301125	35-95	10-95	345	100	3	13,8
COT1.2403L-ALS	6438100300456	95-240	70-240	350	100	3	18,4
COT1.2404L-ALS	6438100302931	240-300	185-300	390	100	3	25,3

CITW1 indoor terminations AHXAMK-W

The termination kit is used for indoor terminating of XLPE insulated medium voltage cables with aluminium tape shield (AHXAMK-W). The kit is suitable for single core cables, containing components for three cores.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Termination length mm	Shed diameter mm	No of sheds per phase	Min. diameter on the insulation mm
24 kV without cable lugs (Al/Cu)							
CITW1.2402L	6438100304225	35-95	10-95	265	62	3	13,8
CITW1.2403L	6438100304232	95-240	70-240	270	62	3	18,4
CITW1.2404L	6438100304249	240-300	185-300	310	62	3	25,3
CITW1.2405L	6438100322922	400-630	400-630	490	62	3	31
CITW1.2406L	6438100322960	800-1000	630-1000	410	78	3	36.8
42kV with cable lugs (Al/Cu)							
CITW1.4202L	6438100324261	70-95	25-95	330-390	62	3	18.4
CITW1.4203L	6438100324278	120-240	- 240	400-430	106	3	25.3
CITW1.4204L	6438100324285	-	- 300	490	111	3	31
CITW1.4205L	6438100322939	400-630	400-630	500-550	62	3	31
CITW1.4206L	6438100324292	800-1000	630-1000	460-490	116	3	36.8

COTW1 outdoor terminations AHXAMK-W

The termination kit is used for outdoor terminating of XLPE insulated medium voltage cables with aluminium tape shield (AHXAMK-W). The kit is suitable for single core cables, containing components for three cores.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Conductor size mm² 36 kV	Conductor size mm² 42 kV	Termination length mm	Shed diameter mm	No of sheds per phase	Min. diameter on the insulation mm
24 kV with cable lugs (Al/Cu)									
COTW1.2402L	6438100304324	35-95	10-95			345	100	3	13,8
COTW1.2403L	6438100304331	95-240	70-240			350	100	3	18,4
COTW1.2404L	6438100304348	240-300	185-300			390	100	3	25,3
COTW1.2405L	6438100322977	400-630	400-630			390	100	3	31
COTW1.2406L	6438100322984	800-1000	630-1000			490	116	3	36.8
42 kV with cable lugs (Al/Cu)									
COTW1.4202L	6438100324308	70-95	25-95			630	100	3	31.1
COTW1.4203L	6438100324315	- 240	120-240			650	106	3	25.3
COTW1.4204L	6438100324322	- 300		150-300		710	111	3	31
COTW1.4205L	6438100324339	400-630	400-630	400-630	400-630	710	111	3	31
COTW1.4206L	6438100324346	800-1000	630-1000	630-1000	630-1000	710	116	3	36.8

Cold shrink cable terminations

MEDIUM

CITH3 hybrid indoor termination kits 3 core XLPE

The termination kit is used for indoor terminating of XLPE insulated medium voltage cables with wire shield. The kit is suitable for three core cables, containing components for three cores.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Termination length mm	Shed diameter mm	No of sheds per phase	Min. diameter on the insulation mm
24 kV with cable lugs (Al/Cu)							
CITH3.2402L	6438100307523	35-95	25-95	500-1100	62	3	15
CITH3.2403L	6438100307080	95-240	70-240	500-1100	62	3	20
CITH3.2404L	6438100314712	240-300	185-300	500-1100	62	3	27,5

CITH31 hybrid indoor termination kits 3 to 1 core

The termination kit is used for indoor terminating of medium voltage three core cables with XLPE insulation and copper wire shield. The kit transfers a three core cable to three single core shielded cables.

Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Termination length mm	Shed diameter mm	No of sheds per phase	Min. diameter on the insulation mm
CITH31.2402L	6438100320867	35-95	10-95	500-2000	62	3	13,8
CITH31.2403L	6438100320874	95-240	70-240	500-2000	62	3	18,4

COTH3 hybrid outdoor termination kits 3 core XLPE

The termination kit is used for outdoor terminating of XLPE insulated medium voltage cables with wire shield. The kit is suitable for three core cables, containing components for three cores.



Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Termination length mm	Shed diameter mm	No of sheds per phase	Min. diameter on the insulation mm
24 kV with cable lugs (Al/Cu)							
COTH3.2402L	6438100307547	35-95	25-95	500-1400	100	3	16
COTH3.2403L	6438100307103	95-240	70-240	500-1400	100	3	20
COTH3.2404L	6438100314736	240-300	185-300	500-1400	100	3	27,5

COTH31 hybrid outdoor termination kits 3 to 1 core XLPE

The termination kit is used for outdoor terminating of medium voltage three core cables with XLPE insulation and copper wire shield. The kit transfers a three core cable to three single core shielded cables.

Product code	GTIN	Conductor size mm² 12 kV	Conductor size mm² 24 kV	Termination length mm	Shed diameter mm	No of sheds per phase	Min. diameter on the insulation mm
24 kV with cable lugs (Al/Cu)							
COTH31.2402L	6438100320881	35-95	10-95	500-2000	100	3	13.8
COTH31.2403L	6438100320898	95-240	70-240	500-2000	100	3	36

Medium voltage cable accessories

Screened Separable Connectors

Screened straight and elbow connectors for 250 A

Screened 250A elbow type straight connectors and pin type straight connectors are used for connections to transformers and switchgears up to 24kV with bushings according to EN 50180 and EN 50181, connection type A (250 A). Suitable for 3-core plastic cables (XLPE, EPR, PE, etc.) both indoors and outdoors. Three phase set including shear head bolt cable lug.



Product code	GTIN	Description	Conductor size 24 kV mm²	Current A
CONE250.2	6438100319830	Elbow Connector	25-95	250
CONS250.2	6438100319847	Straight Connector	25-95	250

Screened separable connectors for 630 A

Screened 630 A connectors are used for connections to transformers and switchgears up to 24kV with bushings according to EN 50180 and EN 50181, connection type C1 (630 A). Suitable for plastic cables (XLPE, EPR, PE, etc.) both indoors and outdoors. Three phase set including shear head bolt cable lugs.



Product code	GTIN	Conductor size 12 kV mm²	Conductor size 24 kV mm²	Current A
CONT630.1	6438100319755	25-70	25-70	630
CONT630.2	6438100319762	95-185	70-185	630
CONT630.3	6438100319779	240-300	120-300	630

Screened separable back connectors for 630 A

Screened separable back connectors 630A are linked directly to the back of CONT630 and CONTB630 connectors with a backside thread of M12. Suitable for plastic (XLPE, EPR, PE, etc.) cables up to 24 kV. Three phase set including shear head bolt cable lugs.



Product code	GTIN	Conductor size 12 kV mm²	Conductor size 24 kV mm²	Current A
CONTB630.1	6438100319786	25-70	25-70	630
CONTB630.2	6438100319793	95-185	70-185	630
CONTB630.3	6438100319809	240-300	120-240	630

Screened 630A Surge Arresters for 630 A

The screened surge arrester can be connected to CONT630 and CONTB630 connectors. The arrester protects transformers, switchgears and transmission lines againts atmospheric and switching overvoltages.



Product code	GTIN	In kA	Uc kV
CONTS630.10-12	6438100319816	10	12
CONTS630.10-24	6438100319823	10	24

Screened separable connectors for 630 A 3-core cable

Screened 630 A connectors are used for connections to transformers and switchgears up to 24kV bushings according to EN 50180 and EN 50181, connection type C1 (630 A).



Product code	GTIN	Conductor size 12 kV	Conductor size 24 kV
CONT630SE.1	6438100321031	Al/Cu 25-70	Al/Cu 25-70
CONT630SE.2	6438100321048	Al/Cu 95-185	Al/Cu 70-185
CONT630SE.3	6438100321055	Al/Cu 185-240	Al/Cu 120-240
CONTB630SE.1	6438100321062	Al/Cu 25-70	Al/Cu 25-70
CONTB630SE.2	6438100321079	Al/Cu 95-185	Al/Cu 70-185
CONTB630SE.3	6438100321086	Al/Cu 185-240	Al/Cu 120-240

Screened Separable Connectors

MEDIUM

Connection plug set 630A CONT630.x

Connection plug CONTP630 can be used to connect branch cable. With plug two or more CONT630.x connectors can be connected together. Set includes three connection plugs.




Product code	GTIN
CONTP630	6438100323578

SJCW additional kits for AHXAMK-W earthing

SJCW2595.2 and SJCW70240.2 additional earthing kits are used when terminating AHXAMK-W cable using CONE250, CONS250, CONT630 or CONTB630 separable connector kits.



Product code	GTIN	Conductor size 12 kV	Conductor size 24 kV
SJCW2595.2	6418677449369	25-95	25-95
SJCW70240.2	6418677433276	70-300	70-300

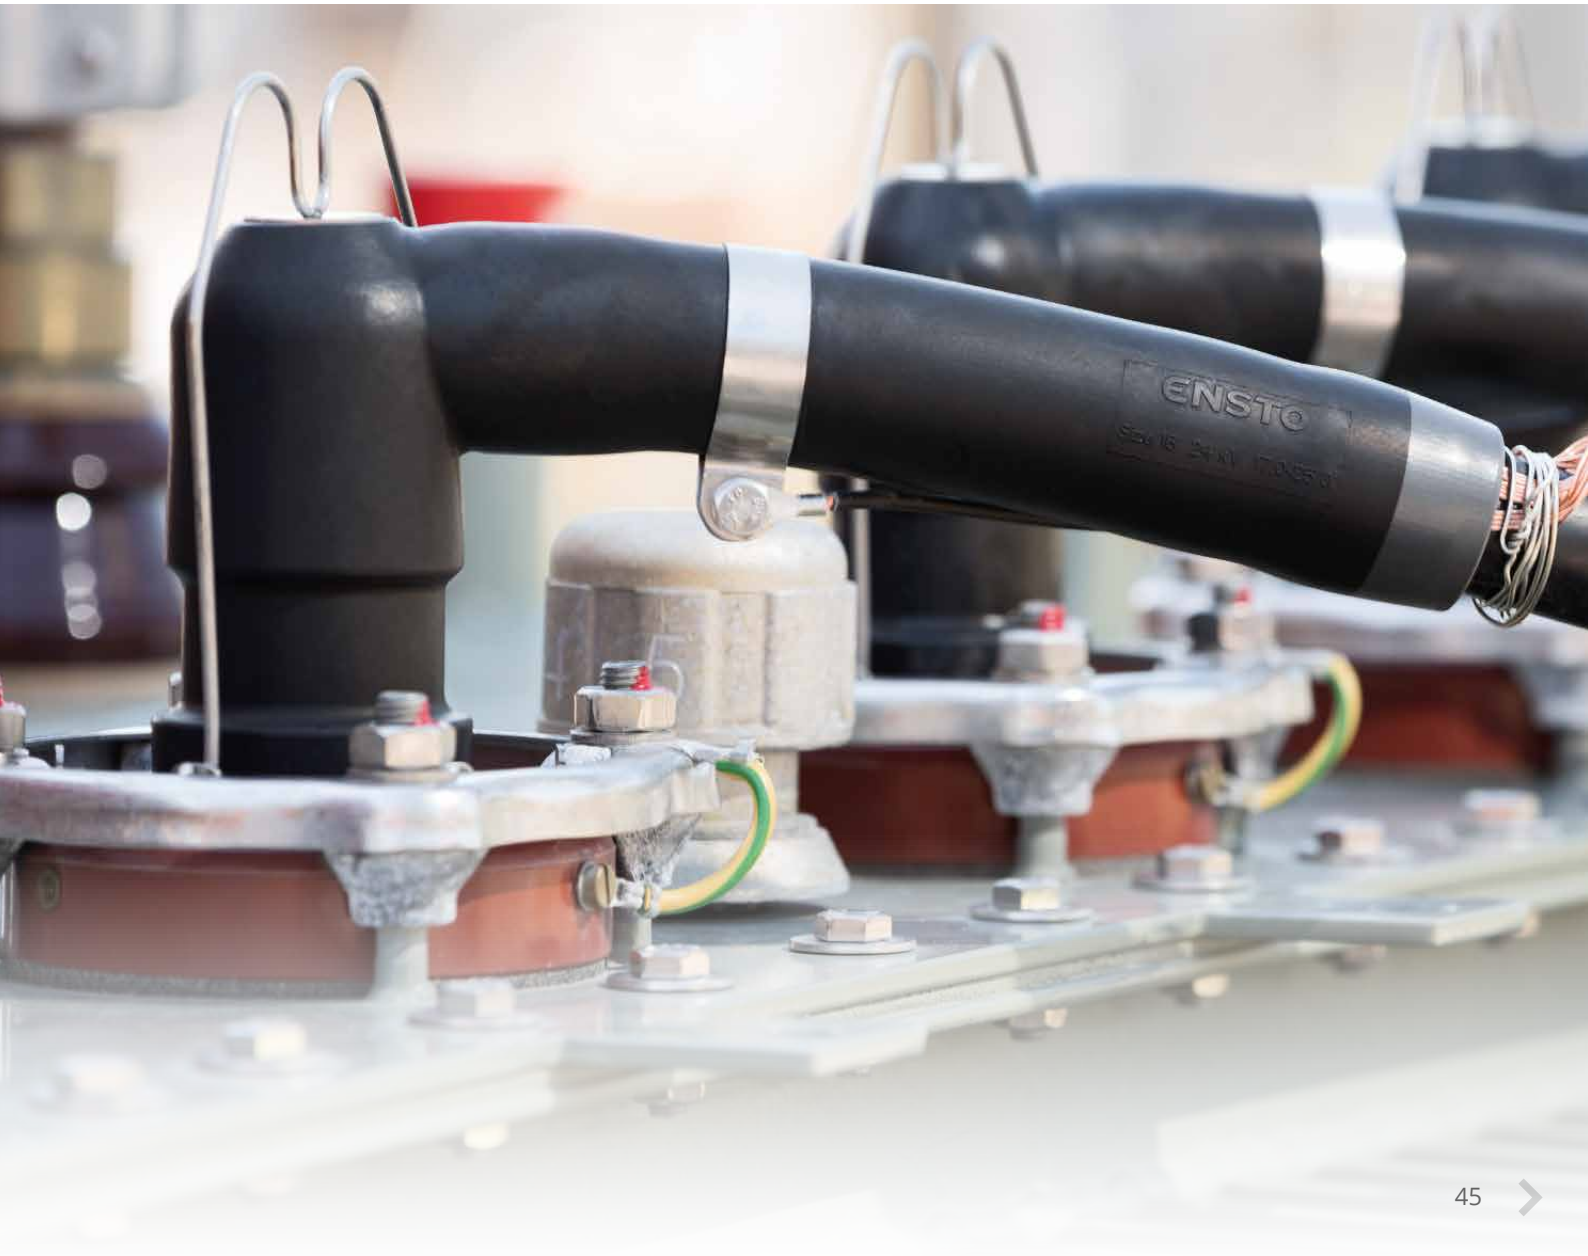

Cable distribution cabinets

Ensto Rapid - Easy, fast and cost-effective

Ensto Rapid cable distribution cabinets are extremely quick to install. After mounting the cabinet, just plug the cables to the pre-installed terminals and you are ready.



Ensto Rapid – a ready solution

Traditionally a cable distribution cabinet has to be built piece by piece from multiple separate components.
– Ensto Rapid is here to ease things up. Ensto Rapid cable distribution cabinets are pre-installed sets that combine the cabinet, terminals and the fuse bases into one, simple solution. Just lower the base of the cabinet and connect the cables to the pre-installed terminals.

Why choose Ensto Rapid over a traditional distribution cabinet?


Ensto Rapid is an ideal solution to places, where only 1-3 fused outputs are needed and where the fuse protecting of the cables is rated 250A. Ensto Rapid cabinets have been sized especially for these needs.

Less to order

As the components of Ensto Rapid cable distribution cabinets have been pre-assembled the factory, the cabinets are always easy to order.


Rapid 2 series

Height: 850mm | Width: 312mm | Depth: 223mm




Ensto Rapid 2.1/1

Main cable line for two 35-240mm² cables. Branch output is 2 x 6-50mm² from one fuse base.




Ensto Rapid 2.1/2

Main cable line for two 35-240mm² cables. Branch output is 2 x 16-95mm² from one fuse base.



Ensto Rapid 2.2/11

Main cable line for two 35-240mm² cables. Branch output is 4 x 6-50mm² from two fuse bases.



Ensto Rapid 2.2/22

Main cable line for two 35-240mm² cables. Branch output is 4 x 16-95mm² from two fuse bases.

Product code	GTIN	Max current A	Voltage V	Frequency AC Hz	Short-circuit current kA	Feed Al/Cu mm²	Outputs Al/Cu mm²	Fuse size	Dimensions W x H x D mm	Weight kg
Rapid2.1/1	6438100315023	200	400	50	<10	2 x 35-240	2 x 6-50	00	312 x 850 x 223	29
Rapid2.1/2	6438100322274	200	400	50	<10	2 x 35-240	2 x 16-95	00	312 x 850 x 223	29
Rapid2.2/11	6438100315030	200	400	50	<10	2 x 35-240	2 x 6-50 / 2 x 6-50	00	312 x 850 x 223	32
Rapid2.2/22	6438100322281	200	400	50	<10	2 x 35-240	2 x 16-95 / 2 x 16-95	00	312 x 850 x 223	32

Accessories

Marking rod

Marking rod can be fixed to either side of the cabinet. Mounting hole distance 500 or 700 mm.



Product code	GTIN	Length m	Description
SKK121.20	6438100301149	2,0	Marking rod can be fixed to either side of the cabinet.
SKK121.14	6438100300517	1,4	Marking rod can be fixed to either side of the cabinet.

Cable fixing ties

The fixing ties can be used for example for wooden, concrete or composite poles as well as for Strain relief bars or C-bars.



Product code	GTIN	Description
Pole fixing tie		
SH709	6438100315559	for Ø 20-80 mm cable
Fixing tie for C-bar		
SH710	6438100315566	for Ø 20-80 mm cable
Steel band fixing tie		
SH711	6438100317898	for Ø 20-80 mm cable

Related products

The steel band fixing tie SH711 can be mounted for example to a concrete or composite pole by using these accessories.



COT36



CT42



COT37

Product code	GTIN	Description
COT36	6418677412189	steel buckle
COT37	6418677412196	steel band
CT42	6418677412332	fixing tool





Lamp post fixtures

Convenient street-lighting

Ensto offers a wide selection of products for connecting and branching underground cables on lamp posts. Ensto's lamp post fixtures are suitable for many different lamp posts. The complete kits make the installation work easy and fast.

Handy products

The Ensto selection includes KE connectors, connector series, fuse bases, circuit-breakers, lamp post fixtures, fuse and branch boxes and lamp post cabinets.



KE connectors and series

- Transparent connector casing – easy to install.
- Durable materials.
- A blue connector available for the neutral conductor.



Lamp post fixture kits

- Kits especially suitable for connecting both aluminum and copper conductors.
- Alternative kits including either a 6A or 10A fuse base, several KE connectors and a 16mm² ground conductor (length 35cm, equipped with a cable lug for the neutral connector).



Fuse boxes and branch boxes

- Enclosures manufactured of weather- and impact-resistant, recyclable polycarbonate plastic.



Lamp post cabinets

- Available as hot galvanized or painted.
- In addition to standard colors, also RAL colors are available by special order.
- Factory-fitted lamp post cabinets.

Product assortment »

Lamp post fixtures

Branching connectors

Ensto connectors are tinned to suit for both aluminium and copper conductors (4 or 6 conductors). The connectors can be used as L, N, PE or PEN connectors.



Product code	GTIN	Description
KE10.1	6418677400049	Al 4x10-35 mm² / Cu 1.5-25 mm²
KE10.1N	6438100330705	Al 4x10-35 mm²/ Cu 1.5-25 mm²
KE10.3	6418677400063	Al 6x10-35 mm² / Cu 1.5-25 mm²
KE10.504	6418677400087	Al 4x10-50 mm² / Cu 2.5-35 mm²
KE10.504N	6418677455421	Al 4x10-50 mm² / Cu 2.5-35 mm²
KE10.506	6418677400094	Al 6x10-50 mm² / Cu 2.5-35 mm²
Covers		
PMR2680.3	6438100321352	for KE10.1 and KE10.504(N) connectors
PMR2680.4	6438100308384	for KE10.1 and KE10.504(N) connectors

Branching connector sets

SV connector sets are used for connecting and branching aluminium and copper cables in lamp posts or in cable cabinets.



Product code	GTIN	Description
SV15	6418677405624	3xKE10.1 and 1xKE10.3 (10-35Al/1.5-25Cu)
SV15.5	6418677405716	4xKE10.1 and 1xKE10.3 (10-35Al/1.5-25Cu)
SV50	6418677405808	3xKE10.504 and 1xKE10.506 (10-50Al/2.5-35Cu)

Fuse bases

LFB-R fuse bases with fuses and 4 mm² or 10 mm² conductors for lamp post installations.



Product code	GTIN	Description
LFB16-06A-R	6438100320904	Fuse base with 6 A fuse and a 4 mm² conductor
LFB16-10A-R	6438100320911	Fuse base with 10 A fuse and a 4 mm² conductor
LFB16.1-06A-R	6438100320966	Fuse base with 6A fuse and a 10 mm² conductor
LFB16.1-10A-R	6438100320973	Fuse base with 10A fuse and a 10 mm² conductor

Lamp post fixtures

LCK and SV fuse base and connector sets are used for connecting and branching aluminium and copper cables in lamp posts or in cable cabinets.



Product code	GTIN	Description
LCK4-16-06A	6438100309176	LFB16-06A-R and SV15
LCK5-16-06A	6438100309183	LFB16-06A-R and SV15.5
LCK4-16-10A	6438100309190	LFB16-10A-R and SV15
LCK5-16-10A	6438100309206	LFB16-10A-R and SV15.5
SV15.105	6438100323523	SV15.5 and SVV3.1
SV15.12	6418677405693	SV15 and SVV3
SV15.125	6418677405709	SV15.5 and SVV3

Circuit breakers

Circuit breakers, IP20, with mounting plates for lamp post installations.



Product code	GTIN	Description
SVV3	6418677405853	10 A
SVV3.1	6438100323790	6 A
SVV3.2	6418677405877	10 A, 2 pole

Branch boxes

Branch boxes include branching connector sets.



Product code	GTIN	Description
SK175	6418677403439	Cable dia 2x16-25
SK180	6418677403446	Cable dia 2x22-32

Fuse boxes

Fuse boxes include fuse bases for 25A or 63A installations. Fuses are not included.



Product code	GTIN	Description	Box dimensions
SK180.25	6418677403453	3x25 A	300x130x200 mm
SK180.63	6418677403460	3x63 A	300x130x200 mm
SK185.63	6438100328283	3x63 A	300x130x300 mm

Lamp post cabinets

Cabinets with or without connectors and fuse bases for 25A or 63A installations. Fuses are not included.



Product code	GTIN	Description
Zinc coated cabinets		
SK160	6418677403378	Zinc coated
SK160.1	6418677403385	Zinc coated, SV15.11
SK160.2	6418677403392	Zinc coated, SV15.11 + SVV1.10
Painted cabinets		
SK160/M	6418677403415	Zinc coated, painted
SK160.1/M	6418677406119	Zinc coated, painted, SV15.11
SK160.2/M	6418677403408	Zinc coated, painted, SV15.11+SVV1.10



Tools

Reliable and safe installation

Ensto's tool selection comprises products especially designed for the needs of network installers. Our tools make the installer's work easier and guarantee a safe installation. A well-performed installation can lengthen a network's service life. Ensto's selection includes various professional hand tools and cable work equipment.





Handy tools for smooth installation

Our tools selection consists of high-quality cable preparation tools for medium and low voltage underground cables, installation tools for both underground cable and overhead line accessory installation and various measuring equipment.



Cable preparation tools

- Insulation removal tools.
- Insulation screen removal tools.
- Outer sheath removal tools.
- Combined tools for outer sheath and insulation removal.
- Cable stands.



Other tools

- Earthing devices.
- Hand tools.
- Measuring equipment.
- Pole climbing irons.
- Cable pulling and handling equipment.
  + large variety of tools for different purposes.

Product assortment »

Underground cable preparation tools

Medium voltage insulation removal tools

Product code	GTIN	Description
ST252	6418677457418	Insulation removal set for 20 kV cables
ST252.1	6418677457425	Spare blade for ST252
ST261	6438100314446	Insulation stripping handle for inserts ST265-273
ST266.10	6438100330286	Insulation removal insert 10kV 35mm² for ST261
ST267.10	6438100330293	Insulation removal insert 10kV 50mm² for ST261
ST270.10	6438100330309	Insulation removal insert 10kV 120mm² for ST261
ST271.10	6438100330316	Insulation removal insert 10kV 150mm² for ST261
ST272.10	6438100330323	Insulation removal insert 10kV 185mm² for ST261
ST273.10	6438100330330	Insulation removal insert 10kV 240mm² for ST261
ST265	6438100316099	Insulation removal insert 20kV 25mm² for ST261
ST266	6438100314453	Insulation removal insert 20kV 35mm² for ST261
ST267	6438100316105	Insulation removal insert 20kV 50mm² for ST261
ST268	6438100316112	Insulation removal insert 20kV 70mm² for ST261
ST269	6438100316129	Insulation removal insert 20kV 95mm² for ST261
ST270	6438100316136	Insulation removal insert 20kV 120mm² for ST261
ST271	6438100316143	Insulation removal insert 20kV 150mm² for ST261
ST272	6438100316150	Insulation removal insert 20kV 185mm² for ST261
ST273	6438100316167	Insulation removal insert 20kV 240mm² for ST261
ST274	6438100316174	Insulation removal tool Ø15-52 mm
ST274.1	6438100330354	Spare blade for ST274



ST252



ST274

Insulation screen removal tools

Product code	GTIN	Description
ST250	6418677457388	Bonded insulation screen removal tool 10-52 mm
ST250.1	6418677457395	Spare blade for ST250
ST308	6438100324117	Bonded insulation screen removal tool 18-60 mm
ST308.1	6438100330026	Spare blade for ST308
ST260	6438100313128	Peelable (non-vulcanized) insulation screen removal tool Ø16-41 mm
ST260.1	6438100317935	Spare blade for ST260



ST250



ST308

Outer sheath removal tools

Product code	GTIN	Description
ST257	6438100311940	Outer sheath/aluminium laminate removal tool Ø16-54 mm
ST257.1	6438100321383	Spare blade for ST257
ST281	6438100320232	Outer sheath/aluminium laminate removal tool Ø16-40 mm
ST281.1	6438100330002	Spare blade for ST281
ST285	6438100320270	Outer sheath/aluminium laminate splitting tool Ø16-60 mm
ST285.1	6438100330019	Spare blade for ST285
ST291	6438100329990	Outer sheath/aluminium laminate removal tool Ø16-58 mm



ST281



ST285

Cable stands

Product code	GTIN	Description
ST277	6438100317089	Cable jointing stand



Additional tools

Product code	GTIN	Description
ST251	6418677457401	Holding tool for connectors/lugs
ST259	6438100312367	Wedge for spreading the outer sheath and aluminium laminate
ST286	6438100320287	Tool for spreading the outer sheath and aluminium laminate
ST258	6438100312015	Metal tie tightening tool
ST310	6438100327903	Metal tie fastening pliers
ST280	6438100318666	Insulation chamfering tool Ø15-60 mm
ST280.1	6438100324483	Spare blade for ST280



ST310



ST280



Product Index

Product code	Product description	Page
CIT1.2402L	CIT1 indoor termination kits 1 core XLPE with Cu wire shield	39
CIT1.2402L-ALS	CIT1-ALS indoor termination kits 1 core XLPE with Al tape shield	40
CIT1.2403L	CIT1 indoor termination kits 1 core XLPE with Cu wire shield	39
CIT1.2403L-ALS	CIT1-ALS indoor termination kits 1 core XLPE with Al tape shield	40
CIT1.2404L	CIT1 indoor termination kits 1 core XLPE with Cu wire shield	39
CIT1.2404L-ALS	CIT1-ALS indoor termination kits 1 core XLPE with Al tape shield	40
CIT1.2405	CIT1 indoor termination kits 1 core XLPE with Cu wire shield	39
CIT1.2405L	CIT1 indoor termination kits 1 core XLPE with Cu wire shield	39
CIT1.2406	CIT1 indoor termination kits 1 core XLPE with Cu wire shield	39
CIT1.2406L	CIT1 indoor termination kits 1 core XLPE with Cu wire shield	39
CIT1.4202L	CIT1 indoor termination kits 1 core XLPE with Cu wire shield	39
CIT1.4203L	CIT1 indoor termination kits 1 core XLPE with Cu wire shield	39
CIT1.4204L	CIT1 indoor termination kits 1 core XLPE with Cu wire shield	39
CIT1.4205	CIT1 indoor termination kits 1 core XLPE with Cu wire shield	39
CIT1.4205L	CIT1 indoor termination kits 1 core XLPE with Cu wire shield	39
CIT1.4206	CIT1 indoor termination kits 1 core XLPE with Cu wire shield	39
CIT1.4206L	CIT1 indoor termination kits 1 core XLPE with Cu wire shield	39
CITH3.2402L	CITH3 hybrid indoor termination kits 3 core XLPE	41
CITH3.2403L	CITH3 hybrid indoor termination kits 3 core XLPE	41
CITH3.2404L	CITH3 hybrid indoor termination kits 3 core XLPE	41
CITH31.2402L	CITH31 hybrid indoor termination kits 3 to 1 core	41
CITH31.2403L	CITH31 hybrid indoor termination kits 3 to 1 core	41
CITW1.2402L	CITW1 indoor terminations AHXAMK-W	40
CITW1.2403L	CITW1 indoor terminations AHXAMK-W	40
CITW1.2404L	CITW1 indoor terminations AHXAMK-W	40
CITW1.2405L	CITW1 indoor terminations AHXAMK-W	40
CITW1.2406L	CITW1 indoor terminations AHXAMK-W	40
CITW1.4202L	CITW1 indoor terminations AHXAMK-W	40
CITW1.4203L	CITW1 indoor terminations AHXAMK-W	40
CITW1.4204L	CITW1 indoor terminations AHXAMK-W	40
CITW1.4205L	CITW1 indoor terminations AHXAMK-W	40
CITW1.4206L	CITW1 indoor terminations AHXAMK-W	40
CJ11.2402C	CJ11 joint kits 1 core XLPE with Cu wire shield with silicone outer sheath	30
CJ11.24045C	CJ11 joint kits 1 core XLPE with Cu wire shield with silicone outer sheath	30
CJ11.2404C	CJ11 joint kits 1 core XLPE with Cu wire shield with silicone outer sheath	30
CJ11.4202C	CJ11 joint kits 1 core XLPE with Cu wire shield with silicone outer sheath	30
CJ11.4203C	CJ11 joint kits 1 core XLPE with Cu wire shield with silicone outer sheath	30
CJ11.4204C	CJ11 joint kits 1 core XLPE with Cu wire shield with silicone outer sheath	30
CJAIO11.2403C	CJAIO11 All-in-One joint kits for 1 core XLPE with Cu wire	30
CJAIO11.2402C	CJAIO11 All-in-One joint kits for 1 core XLPE with Cu wire	30
CJAIO11.2404C	CJAIO11 All-in-One joint kits for 1 core XLPE with Cu wire	30
CJAIO11.2405C	CJAIO11 All-in-One joint kits for 1 core XLPE with Cu wire	30
CJAIO11.2406C	CJAIO11 All-in-One joint kits for 1 core XLPE with Cu wire	30
CJAIO11.3603C	CJAIO11 All-in-One joint kits for 1 core XLPE with Cu wire	31
CJAIO11.3603C-REP	CJAIO11 All-in-One repair joint kits for 1 core XLPE with Cu wire and Al laminate screen	31
CJAIOT11.2403C	CJAIOT11 All-in-One transition joint kits 1 core XLPE	31
CJAIOW11.2403C	CJAIOW11 All-in-One joint kits for 1 core "Wiski" cables	31
CJH11.2402C	CJH11 hybrid joint kits 1 core XLPE with Cu wire shield with heat shrink outer sheath	29
CJH11.2403C	CJH11 hybrid joint kits 1 core XLPE with Cu wire shield with heat shrink outer sheath	29
CJH11.24045C	CJH11 hybrid joint kits 1 core XLPE with Cu wire shield with heat shrink outer sheath	29
CJH11.2404C	CJH11 hybrid joint kits 1 core XLPE with Cu wire shield with heat shrink outer sheath	29
CJH11.2405C	CJH11 hybrid joint kits 1 core XLPE with Cu wire shield with heat shrink outer sheath	29
CJH11.2406C	CJH11 hybrid joint kits 1 core XLPE with Cu wire shield with heat shrink outer sheath	29
CJH11.4202C	CJH11 hybrid joint kits 1 core XLPE with Cu wire shield with heat shrink outer sheath	29
CJH11.4203C	CJH11 hybrid joint kits 1 core XLPE with Cu wire shield with heat shrink outer sheath	29
CJH11.4204C	CJH11 hybrid joint kits 1 core XLPE with Cu wire shield with heat shrink outer sheath	29
CJH11.4205C	CJH11 hybrid joint kits 1 core XLPE with Cu wire shield with heat shrink outer sheath	29
CJH11.42045C	CJH11 hybrid joint kits 1 core XLPE with Cu wire shield with heat shrink outer sheath	29
CJH11.4206C	CJH11 hybrid joint kits 1 core XLPE with Cu wire shield with heat shrink outer sheath	29
CJH33.2402C	CJH33 hybrid joint kits 3 core XLPE with Cu wire shield with heat shrink outer sheath	30
CJH33.2402CTT	CJH33 hybrid joint kits 3 core XLPE TT with Cu wire shield with heat shrink outer sheath	30
CJH33.2403C	CJH33 hybrid joint kits 3 core XLPE with Cu wire shield with heat shrink outer sheath	30
CJH33.2403CTT	CJH33 hybrid joint kits 3 core XLPE TT with Cu wire shield with heat shrink outer sheath	30
CJH33.2404C	CJH33 hybrid joint kits 3 core XLPE with Cu wire shield with heat shrink outer sheath	30
CJWH11.2402C	CJWH hybrid joint kits AHXAMK-W with heat shrink outer sheath	29
CJWH11.2403C	CJWH hybrid joint kits AHXAMK-W with heat shrink outer sheath	29
CJWH11.2404C	CJWH hybrid joint kits AHXAMK-W with heat shrink outer sheath	29
CJWH11.2405	CJWH hybrid joint kits AHXAMK-W with heat shrink outer sheath	29
CJWH11.2405C	CJWH hybrid joint kits AHXAMK-W with heat shrink outer sheath	29
CJWH11.2406	CJWH hybrid joint kits AHXAMK-W with heat shrink outer sheath	29
CJWH11.2406C	CJWH hybrid joint kits AHXAMK-W with heat shrink outer sheath	29
CJWH11.4203C	CJWH hybrid joint kits AHXAMK-W with heat shrink outer sheath	29
CJWH11.4204C	CJWH hybrid joint kits AHXAMK-W with heat shrink outer sheath	29
CJWH11.4205C	CJWH hybrid joint kits AHXAMK-W with heat shrink outer sheath	29
CJWH11.4206C	CJWH hybrid joint kits AHXAMK-W with heat shrink outer sheath	29
CJWH11.42045C	CJWH hybrid joint kits AHXAMK-W with heat shrink outer sheath	29
CJWH11.4205C	CJWH hybrid joint kits AHXAMK-W with heat shrink outer sheath	29
CJWH11.4206C	CJWH hybrid joint kits AHXAMK-W with heat shrink outer sheath	29
CONE250.2	Screened straight and elbow connectors for 250 A	42
CONS250.2	Screened straight and elbow connectors for 250 A	42

Product code	Product description	Page
CONT630.1	Screened separable connectors for 630 A	42
CONT630.2	Screened separable connectors for 630 A	42
CONT630.3	Screened separable connectors for 630 A	42
CONTB630.1	Screened separable back connectors for 630 A	42
CONTB630.2	Screened separable back connectors for 630 A	42
CONTB630.3	Screened separable back connectors for 630 A	42
CONTP630	Connection plug set 630A CONT630.x	42
CONTS630.10-12	Screened separable connectors for 630 A 3-core cable	42
CONTS630.10-24	Screened separable connectors for 630 A 3-core cable	42
CONT630SE.1	Screened separable connectors for 630 A 3-core cable	42
CONT630SE.2	Screened separable connectors for 630 A 3-core cable	42
CONT630SE.3	Screened separable connectors for 630 A 3-core cable	42
CONTB630SE.1	Screened separable connectors for 630 A 3-core cable	42
CONTB630SE.2	Screened separable connectors for 630 A 3-core cable	42
CONTB630SE.3	Screened separable connectors for 630 A 3-core cable	42
COT1.2402L	COT1 outdoor termination kits 1 core XLPE with Cu wire shield	39
COT1.2402L-ALS	COT1-ALS outdoor termination kits 1 core XLPE with Al tape shield	40
COT1.2403L	COT1 outdoor termination kits 1 core XLPE with Cu wire shield	39
COT1.2403L-ALS	COT1-ALS outdoor termination kits 1 core XLPE with Al tape shield	40
COT1.2404L	COT1 outdoor termination kits 1 core XLPE with Cu wire shield	39
COT1.2404L-ALS	COT1-ALS outdoor termination kits 1 core XLPE with Al tape shield	40
COT1.2405	COT1 outdoor termination kits 1 core XLPE with Cu wire shield	39
COT1.2405L	COT1 outdoor termination kits 1 core XLPE with Cu wire shield	39
COT1.2406	COT1 outdoor termination kits 1 core XLPE with Cu wire shield	39
COT1.2406L	COT1 outdoor termination kits 1 core XLPE with Cu wire shield	39
COT1.4202L	COT1 outdoor termination kits 1 core XLPE with Cu wire shield	39
COT1.4203L	COT1 outdoor termination kits 1 core XLPE with Cu wire shield	39
COT1.4204L	COT1 outdoor termination kits 1 core XLPE with Cu wire shield	39
COT1.4205	COT1 outdoor termination kits 1 core XLPE with Cu wire shield	39
COT1.4205L	COT1 outdoor termination kits 1 core XLPE with Cu wire shield	39
COT1.4206	COT1 outdoor termination kits 1 core XLPE with Cu wire shield	39
COT1.4206L	COT1 outdoor termination kits 1 core XLPE with Cu wire shield	39
COTH3.2402L	COTH3 hybrid outdoor termination kits 3 core XLPE	41
COTH3.2403L	COTH3 hybrid outdoor termination kits 3 core XLPE	41
COTH3.2404L	COTH3 hybrid outdoor termination kits 3 core XLPE	41
COTH31.2402L	COTH31 hybrid outdoor termination kits 3 to 1 core XLPE	41
COTH31.2403L	COTH31 hybrid outdoor termination kits 3 to 1 core XLPE	41
COTW1.2402L	COTW1 outdoor terminations AHXAMK-W	40
COTW1.2403L	COTW1 outdoor terminations AHXAMK-W	40
COTW1.2404L	COTW1 outdoor terminations AHXAMK-W	40
COTW1.2405L	COTW1 outdoor terminations AHXAMK-W	40
COTW1.2406L	COTW1 outdoor terminations AHXAMK-W	40
COTW1.4202L	COTW1 outdoor terminations AHXAMK-W	40
COTW1.4203L	COTW1 outdoor terminations AHXAMK-W	40
COTW1.4204L	COTW1 outdoor terminations AHXAMK-W	40
COTW1.4205L	COTW1 outdoor terminations AHXAMK-W	40
COTW1.4206L	COTW1 outdoor terminations AHXAMK-W	40
HIT1.1201	HIT1 indoor termination kits 1 core XLPE	32
HIT1.1201L	HIT1 indoor termination kits 1 core XLPE	32
HIT1.1202	HIT1 indoor termination kits 1 core XLPE	32
HIT1.1202L	HIT1 indoor termination kits 1 core XLPE	32
HIT1.1203	HIT1 indoor termination kits 1 core XLPE	32
HIT1.1203L	HIT1 indoor termination kits 1 core XLPE	32
HIT1.1204	HIT1 indoor termination kits 1 core XLPE	32
HIT1.1204L	HIT1 indoor termination kits 1 core XLPE	32
HIT1.1205	HIT1 indoor termination kits 1 core XLPE	32
HIT1.1205L	HIT1 indoor termination kits 1 core XLPE	32
HIT1.1206	HIT1 indoor termination kits 1 core XLPE	32
HIT1.1206L	HIT1 indoor termination kits 1 core XLPE	32
HIT1.1212R	HIT1_R indoor termination kits 1 core XLPE armoured	34
HIT1.1212RL	HIT1_R indoor termination kits 1 core XLPE armoured	34
HIT1.1213R	HIT1_R indoor termination kits 1 core XLPE armoured	34
HIT1.1213RL	HIT1_R indoor termination kits 1 core XLPE armoured	34
HIT1.1214R	HIT1_R indoor termination kits 1 core XLPE armoured	34
HIT1.1214RL	HIT1_R indoor termination kits 1 core XLPE armoured	34
HIT1.1215R	HIT1_R indoor termination kits 1 core XLPE armoured	34
HIT1.1215RL	HIT1_R indoor termination kits 1 core XLPE armoured	34
HIT1.1216R	HIT1_R indoor termination kits 1 core XLPE armoured	34
HIT1.1216RL	HIT1_R indoor termination kits 1 core XLPE armoured	34
HIT1.2402	HIT1 indoor termination kits 1 core XLPE	32
HIT1.2402L	HIT1 indoor termination kits 1 core XLPE	32
HIT1.2403	HIT1 indoor termination kits 1 core XLPE	32
HIT1.2403L	HIT1 indoor termination kits 1 core XLPE	32
HIT1.2404L	HIT1 indoor termination kits 1 core XLPE	32
HIT1.2405	HIT1 indoor termination kits 1 core XLPE	32
HIT1.2405L	HIT1 indoor termination kits 1 core XLPE	32
HIT1.2406	HIT1 indoor termination kits 1 core XLPE	32
HIT1.2406L	HIT1 indoor termination kits 1 core XLPE	32

Product code	Product description	Page
HIT1.3601	HIT1 indoor termination kits 1 core XLPE	32
HIT1.3601L	HIT1 indoor termination kits 1 core XLPE	32
HIT1.3602	HIT1 indoor termination kits 1 core XLPE	32
HIT1.3602L	HIT1 indoor termination kits 1 core XLPE	32
HIT1.3603	HIT1 indoor termination kits 1 core XLPE	32
HIT1.3603L	HIT1 indoor termination kits 1 core XLPE	32
HIT1.3604	HIT1 indoor termination kits 1 core XLPE	32
HIT1.3604L	HIT1 indoor termination kits 1 core XLPE	32
HIT1.3605	HIT1 indoor termination kits 1 core XLPE	32
HIT1.3605L	HIT1 indoor termination kits 1 core XLPE	32
HIT3.0601L	HIT3 indoor termination kits 3 core PVC	34
HIT3.0602	HIT3 indoor termination kits 3 core PVC	34
HIT3.0602L	HIT3 indoor termination kits 3 core PVC	34
HIT3.0603	HIT3 indoor termination kits 3 core PVC	34
HIT3.0603L	HIT3 indoor termination kits 3 core PVC	34
HIT3.0604	HIT3 indoor termination kits 3 core PVC	34
HIT3.0604L	HIT3 indoor termination kits 3 core PVC	34
HIT3.1201	HIT3 indoor termination kits 3 core XLPE	33
HIT3.1201L	HIT3 indoor termination kits 3 core XLPE	33
HIT3.1202	HIT3 indoor termination kits 3 core XLPE	33
HIT3.1202L	HIT3 indoor termination kits 3 core XLPE	33
HIT3.1203	HIT3 indoor termination kits 3 core XLPE	33
HIT3.1203L	HIT3 indoor termination kits 3 core XLPE	33
HIT3.1204	HIT3 indoor termination kits 3 core XLPE	33
HIT3.1204L	HIT3 indoor termination kits 3 core XLPE	33
HIT3.1211	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.1211L	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.1212	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.1212L	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.1212R	HIT3_R indoor termination kits 3 core XLPE armoured	34
HIT3.1212RL	HIT3_R indoor termination kits 3 core XLPE armoured	34
HIT3.1213	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.1213L	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.1213R	HIT3_R indoor termination kits 3 core XLPE armoured	34
HIT3.1213RL	HIT3_R indoor termination kits 3 core XLPE armoured	34
HIT3.1214	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.1214L	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.1214R	HIT3_R indoor termination kits 3 core XLPE armoured	34
HIT3.1214RL	HIT3_R indoor termination kits 3 core XLPE armoured	34
HIT3.2402	HIT3 indoor termination kits 3 core XLPE	33
HIT3.2402L	HIT3 indoor termination kits 3 core XLPE	33
HIT3.2403	HIT3 indoor termination kits 3 core XLPE	33
HIT3.2403L	HIT3 indoor termination kits 3 core XLPE	33
HIT3.2404	HIT3 indoor termination kits 3 core XLPE	33
HIT3.2404L	HIT3 indoor termination kits 3 core XLPE	33
HIT3.2412	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.2412L	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.2413	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.2413L	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.2414	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.2414L	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.3601	HIT3 indoor termination kits 3 core XLPE	33
HIT3.3601L	HIT3 indoor termination kits 3 core XLPE	33
HIT3.3602	HIT3 indoor termination kits 3 core XLPE	33
HIT3.3602L	HIT3 indoor termination kits 3 core XLPE	33
HIT3.3603	HIT3 indoor termination kits 3 core XLPE	33
HIT3.3603L	HIT3 indoor termination kits 3 core XLPE	33
HIT3.3611	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.3611L	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.3612	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.3612L	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.3613	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT3.3613L	HIT3 indoor termination kits semi conductive 3 core XLPE	33
HIT31.1202	HIT31 indoor termination kits 3 to 1 core XLPE	34
HIT31.1202L	HIT31 indoor termination kits 3 to 1 core XLPE	34
HIT31.1203	HIT31 indoor termination kits 3 to 1 core XLPE	34
HIT31.1203L	HIT31 indoor termination kits 3 to 1 core XLPE	34
HIT31.2402	HIT31 indoor termination kits 3 to 1 core XLPE	34
HIT31.2402L	HIT31 indoor termination kits 3 to 1 core XLPE	34
HIT31.2403	HIT31 indoor termination kits 3 to 1 core XLPE	34
HIT31.2403L	HIT31 indoor termination kits 3 to 1 core XLPE	34
HITHP3.2402	HITHP3 indoor termination kits 3 core H-paper	35
HITHP3.2402L	HITHP3 indoor termination kits 3 core H-paper	35
HITHP3.2403	HITHP3 indoor termination kits 3 core H-paper	35
HITHP3.2403L	HITHP3 indoor termination kits 3 core H-paper	35
HITHW1.2402	HITHW1 indoor termination kits AHXAMK-W	32
HITHW1.2402L	HITHW1 indoor termination kits AHXAMK-W	32
HITHW1.2403	HITHW1 indoor termination kits AHXAMK-W	32

Product code	Product description	Page
HITHW1.2403L	HITHW1 indoor termination kits AHXAMK-W	32
HITHW1.2404	HITHW1 indoor termination kits AHXAMK-W	32
HITHW1.2404L	HITHW1 indoor termination kits AHXAMK-W	32
HITP3.1201	HITP3 indoor termination kits 3 core belted paper	35
HITP3.1201L	HITP3 indoor termination kits 3 core belted paper	35
HITP3.1202	HITP3 indoor termination kits 3 core belted paper	35
HITP3.1202L	HITP3 indoor termination kits 3 core belted paper	35
HITP3.1203	HITP3 indoor termination kits 3 core belted paper	35
HITP3.1203L	HITP3 indoor termination kits 3 core belted paper	35
HITU3.1201	HITU3 indoor termination kits universal cables	34
HITU3.1201L	HITU3 indoor termination kits universal cables	34
HITU3.2401	HITU3 indoor termination kits universal cables	34
HITU3.2401L	HITU3 indoor termination kits universal cables	34
HITU3.2402	HITU3 indoor termination kits universal cables	34
HJ11.1201	HJ11 joint kits 1 core XLPE	24
HJ11.1201C	HJ11 joint kits 1 core XLPE	24
HJ11.1202	HJ11 joint kits 1 core XLPE	24
HJ11.1202C	HJ11 joint kits 1 core XLPE	24
HJ11.1203	HJ11 joint kits 1 core XLPE	24
HJ11.1203C	HJ11 joint kits 1 core XLPE	24
HJ11.1204	HJ11 joint kits 1 core XLPE	24
HJ11.1204C	HJ11 joint kits 1 core XLPE	24
HJ11.1205	HJ11 joint kits 1 core XLPE	24
HJ11.1205C	HJ11 joint kits 1 core XLPE	24
HJ11.1206	HJ11 joint kits 1 core XLPE	24
HJ11.1206C	HJ11 joint kits 1 core XLPE	24
HJ11.1212R	HJ11 joint kits 3 core XLPE armoured	28
HJ11.1213R	HJ11 joint kits 3 core XLPE armoured	28
HJ11.1214R	HJ11 joint kits 3 core XLPE armoured	28
HJ11.1215R	HJ11 joint kits 3 core XLPE armoured	28
HJ11.1216R	HJ11 joint kits 3 core XLPE armoured	28
HJ11.1212RC	HJ11 joint kits 3 core XLPE armoured	28
HJ11.1213RC	HJ11 joint kits 3 core XLPE armoured	28
HJ11.1214RC	HJ11 joint kits 3 core XLPE armoured	28
HJ11.1215RC	HJ11 joint kits 3 core XLPE armoured	28
HJ11.1216RC	HJ11 joint kits 3 core XLPE armoured	28
HJ11.2402	HJ11 joint kits 1 core XLPE	24
HJ11.2402C	HJ11 joint kits 1 core XLPE	24
HJ11.2403	HJ11 joint kits 1 core XLPE	24
HJ11.2403C	HJ11 joint kits 1 core XLPE	24
HJ11.2404	HJ11 joint kits 1 core XLPE	24
HJ11.2404C	HJ11 joint kits 1 core XLPE	24
HJ11.2405	HJ11 joint kits 1 core XLPE	24
HJ11.2405C	HJ11 joint kits 1 core XLPE	24
HJ11.2406	HJ11 joint kits 1 core XLPE	24
HJ11.2406C	HJ11 joint kits 1 core XLPE	24
HJ11.3601	HJ11 joint kits 1 core XLPE	24
HJ11.3601C	HJ11 joint kits 1 core XLPE	24
HJ11.3602	HJ11 joint kits 1 core XLPE	24
HJ11.3602C	HJ11 joint kits 1 core XLPE	24
HJ11.3603	HJ11 joint kits 1 core XLPE	24
HJ11.3603C	HJ11 joint kits 1 core XLPE	24
HJ11.3604	HJ11 joint kits 1 core XLPE	24
HJ11.3604C	HJ11 joint kits 1 core XLPE	24
HJ11.3605	HJ11 joint kits 1 core XLPE	24
HJ11.3605C	HJ11 joint kits 1 core XLPE	24
HJ11.3605C	HJ11 joint kits 1 core XLPE	24
HJ33.0603C	HJ33 PVC heat shrink joint	28
HJ33.0602C	HJ33 PVC heat shrink joint	28
HJ33.1201	HJ33 joint kits 3 core XLPE	25
HJ33.1201C	HJ33 joint kits 3 core XLPE	25
HJ33.1202	HJ33 joint kits 3 core XLPE	25
HJ33.1202C	HJ33 joint kits 3 core XLPE	25
HJ33.1203	HJ33 joint kits 3 core XLPE	25
HJ33.1203C	HJ33 joint kits 3 core XLPE	25
HJ33.1204	HJ33 joint kits 3 core XLPE	25
HJ33.1204C	HJ33 joint kits 3 core XLPE	25
HJ33.1212R	HJ33_R joint kits 3 core XLPE armoured	27
HJ33.1212RC	HJ33_R joint kits 3 core XLPE armoured	27
HJ33.1213R	HJ33_R joint kits 3 core XLPE armoured	27
HJ33.1213RC	HJ33_R joint kits 3 core XLPE armoured	27
HJ33.1214R	HJ33_R joint kits 3 core XLPE armoured	27
HJ33.1214RC	HJ33_R joint kits 3 core XLPE armoured	27
HJ33.2402	HJ33 joint kits 3 core XLPE	25
HJ33.2402C	HJ33 joint kits 3 core XLPE	25
HJ33.2403	HJ33 joint kits 3 core XLPE	25
HJ33.2403C	HJ33 joint kits 3 core XLPE	25
HJ33.2404	HJ33 joint kits 3 core XLPE	25

Product code	Product description	Page
HJ33.2404C	HJ33 joint kits 3 core XLPE	25
HJHP33.2402	HJHP33 joint kits 3 core H-paper	25
HJHP33.2402C	HJHP33 joint kits 3 core H-paper	25
HJHP33.2403	HJHP33 joint kits 3 core H-paper	25
HJHP33.2403C	HJHP33 joint kits 3 core H-paper	25
HJHT31.2402	HJHT31 transition joint kits 3 core H-paper to 1 core XLPE	26
HJHT31.2402C	HJHT31 transition joint kits 3 core H-paper to 1 core XLPE	26
HJHT31.2403	HJHT31 transition joint kits 3 core H-paper to 1 core XLPE	26
HJHT31.2403C	HJHT31 transition joint kits 3 core H-paper to 1 core XLPE	26
HJHT33.2402	HJHT33 transition joint kits 3 core H-paper to 3 core XLPE	27
HJHT33.2402C	HJHT33 transition joint kits 3 core H-paper to 3 core XLPE	27
HJHT33.2403	HJHT33 transition joint kits 3 core H-paper to 3 core XLPE	27
HJHT33.2403C	HJHT33 transition joint kits 3 core H-paper to 3 core XLPE	27
HJP11.2402	HJP11 joint kits 3 core paper	25
HJP11.2402C	HJP11 joint kits 3 core paper	25
HJP11.2403	HJP11 joint kits 3 core paper	25
HJP11.2403C	HJP11 joint kits 3 core paper	25
HJP33.1202	HJP33 joint kits 3 core belted paper	25
HJP33.1202C	HJP33 joint kits 3 core belted paper	25
HJP33.1203	HJP33 joint kits 3 core belted paper	25
HJP33.1203C	HJP33 joint kits 3 core belted paper	25
HJP33.1204	HJP33 joint kits 3 core belted paper	25
HJP33.1204C	HJP33 joint kits 3 core belted paper	25
HJT11.2402	HJT11 transition joint kits 3 core paper to 1 core XLPE	26
HJT11.2402C	HJT11 transition joint kits 3 core paper to 1 core XLPE	26
HJT11.2403	HJT11 transition joint kits 3 core paper to 1 core XLPE	26
HJT11.2403C	HJT11 transition joint kits 3 core paper to 1 core XLPE	26
HJT11.2404	HJT11 transition joint kits 3 core paper to 1 core XLPE	26
HJT11.2404C	HJT11 transition joint kits 3 core paper to 1 core XLPE	26
HJT13.2402	HJT13 transition joint kits 3 core paper to 1 core XLPE	26
HJT13.2402C	HJT13 transition joint kits 3 core paper to 1 core XLPE	26
HJT13.2403	HJT13 transition joint kits 3 core paper to 1 core XLPE	26
HJT13.2403C	HJT13 transition joint kits 3 core paper to 1 core XLPE	26
HJT13.2404	HJT13 transition joint kits 3 core paper to 1 core XLPE	26
HJT13.2404C	HJT13 transition joint kits 3 core paper to 1 core XLPE	26
HJT31.1202	HJT31 transition joint kits 3 core belted paper to 1 core XLPE	27
HJT31.1202C	HJT31 transition joint kits 3 core belted paper to 1 core XLPE	27
HJT31.1203	HJT31 transition joint kits 3 core belted paper to 1 core XLPE	27
HJT31.1203C	HJT31 transition joint kits 3 core belted paper to 1 core XLPE	27
HJT31.1204	HJT31 transition joint kits 3 core belted paper to 1 core XLPE	27
HJT31.1204C	HJT31 transition joint kits 3 core belted paper to 1 core XLPE	27
HJT33.1202	HJT33 transition joint kits 3 core belted paper to 3 core XLPE	27
HJT33.1202C	HJT33 transition joint kits 3 core belted paper to 3 core XLPE	27
HJT33.1203	HJT33 transition joint kits 3 core belted paper to 3 core XLPE	27
HJT33.1203C	HJT33 transition joint kits 3 core belted paper to 3 core XLPE	27
HJT33.1204	HJT33 transition joint kits 3 core belted paper to 3 core XLPE	27
HJT33.1204C	HJT33 transition joint kits 3 core belted paper to 3 core XLPE	27
HJTW11.2402	HJTW11 transition joint kits 3 core paper to AHAXMK-W	26
HJTW11.2402C	HJTW11 transition joint kits 3 core paper to AHAXMK-W	26
HJTW11.2403	HJTW11 transition joint kits 3 core paper to AHAXMK-W	26
HJTW11.2403C	HJTW11 transition joint kits 3 core paper to AHAXMK-W	26
HJTW11.2404	HJTW11 transition joint kits 3 core paper to AHAXMK-W	26
HJTW11.2404C	HJTW11 transition joint kits 3 core paper to AHAXMK-W	26
HJU33.2401	HJU33 joint kits universal cables	27
HJU33.2402	HJU33 joint kits universal cables	27
HJW11.2402	HJW11 joint kits AHXAMK-W	24
HJW11.2402C	HJW11 joint kits AHXAMK-W	24
HJW11.2403	HJW11 joint kits AHXAMK-W	24
HJW11.2403C	HJW11 joint kits AHXAMK-W	24
HJW11.2404	HJW11 joint kits AHXAMK-W	24
HJW11.2404C	HJW11 joint kits AHXAMK-W	24
HOT1.1201L	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.1202	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.1202L	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.1203	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.1203L	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.1204	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.1204L	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.1205	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.1205L	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.1206	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.1206L	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.1212R	HOT1 outdoor termination kits XLPE armoured	38
HOT1.1212RL	HOT1 outdoor termination kits XLPE armoured	38
HOT1.1213R	HOT1 outdoor termination kits XLPE armoured	38
HOT1.1213RL	HOT1 outdoor termination kits XLPE armoured	38
HOT1.1214R	HOT1 outdoor termination kits XLPE armoured	38
HOT1.1214RL	HOT1 outdoor termination kits XLPE armoured	38

Product code	Product description	Page
HOT1.1215R	HOT1 outdoor termination kits XLPE armoured	38
HOT1.1215RL	HOT1 outdoor termination kits XLPE armoured	38
HOT1.1216R	HOT1 outdoor termination kits XLPE armoured	38
HOT1.1216RL	HOT1 outdoor termination kits XLPE armoured	38
HOT1.2402	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.2402L	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.2403	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.2403L	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.2404	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.2404L	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.2405	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.2405L	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.2406	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.2406L	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.3601	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.3601L	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.3602	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.3602L	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.3603	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.3603L	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.3604	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.3604L	HOT1 outdoor termination kits 1 core XLPE	35
HOT1.3605	HOT1 outdoor termination kits 1 core XLPE	35
HOT3.0601L	HOT3 outdoor termination kits 3 core PVC	37
HOT3.0602	HOT3 outdoor termination kits 3 core PVC	37
HOT3.0602L	HOT3 outdoor termination kits 3 core PVC	37
HOT3.0603	HOT3 outdoor termination kits 3 core PVC	37
HOT3.0603L	HOT3 outdoor termination kits 3 core PVC	37
HOT3.0604	HOT3 outdoor termination kits 3 core PVC	37
HOT3.0604L	HOT3 outdoor termination kits 3 core PVC	37
HOT3.0611L	HOT3 outdoor termination kits 3 core PVC	37
HOT3.0612	HOT3 outdoor termination kits 3 core PVC	37
HOT3.0613	HOT3 outdoor termination kits 3 core PVC	37
HOT3.0613L	HOT3 outdoor termination kits 3 core PVC	37
HOT3.0614	HOT3 outdoor termination kits 3 core PVC	37
HOT3.0614L	HOT3 outdoor termination kits 3 core PVC	37
HOT3.1201	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.1201L	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.1202	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.1202L	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.1203	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.1203L	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.1204	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.1204L	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.1211	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.1211L	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.1212	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.1212L	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.1212R	HOT3_R outdoor termination kits 3 core XLPE armoured	38
HOT3.1212RL	HOT3_R outdoor termination kits 3 core XLPE armoured	38
HOT3.1213	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.1213L	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.1213R	HOT3_R outdoor termination kits 3 core XLPE armoured	38
HOT3.1213RL	HOT3_R outdoor termination kits 3 core XLPE armoured	38
HOT3.1214	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.1214L	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.1214R	HOT3_R outdoor termination kits 3 core XLPE armoured	38
HOT3.1214RL	HOT3_R outdoor termination kits 3 core XLPE armoured	38
HOT3.2402	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.2402L	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.2403	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.2403L	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.2404	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.2404L	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.2412	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.2412L	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.2413	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.2413L	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.2414	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.2414L	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.3601	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.3601L	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.3602	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.3602L	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.3603	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.3603L	HOT3 outdoor termination kits 3 core XLPE	36
HOT3.3611	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.3611L	HOT3 outdoor termination kits semi conductive 3 core XLPE	37

Product code	Product description	Page
HOT3.3612	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.3612L	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.3613	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT3.3613L	HOT3 outdoor termination kits semi conductive 3 core XLPE	37
HOT31.1202	HOT31 outdoor termination kits 3 to 1 core XLPE	36
HOT31.1202L	HOT31 outdoor termination kits 3 to 1 core XLPE	36
HOT31.1203	HOT31 outdoor termination kits 3 to 1 core XLPE	36
HOT31.1203L	HOT31 outdoor termination kits 3 to 1 core XLPE	36
HOT31.2402	HOT31 outdoor termination kits 3 to 1 core XLPE	36
HOT31.2402L	HOT31 outdoor termination kits 3 to 1 core XLPE	36
HOT31.2403	HOT31 outdoor termination kits 3 to 1 core XLPE	36
HOT31.2403L	HOT31 outdoor termination kits 3 to 1 core XLPE	36
HOTHP3.2402	HOTHP3 outdoor termination kits 3 core H-paper	38
HOTHP3.2402L	HOTHP3 outdoor termination kits 3 core H-paper	38
HOTHP3.2403	HOTHP3 outdoor termination kits 3 core H-paper	38
HOTHP3.2403L	HOTHP3 outdoor termination kits 3 core H-paper	38
HOTHW1.2402	HOTHW1 outdoor termination kits AHXAMK-W	36
HOTHW1.2402L	HOTHW1 outdoor termination kits AHXAMK-W	36
HOTHW1.2403	HOTHW1 outdoor termination kits AHXAMK-W	36
HOTHW1.2403L	HOTHW1 outdoor termination kits AHXAMK-W	36
HOTHW1.2404	HOTHW1 outdoor termination kits AHXAMK-W	36
HOTHW1.2404L	HOTHW1 outdoor termination kits AHXAMK-W	36
HOTP1.2401	HOTP1 outdoor termination kits 3 core paper	38
HOTP1.2401L	HOTP1 outdoor termination kits 3 core paper	38
HOTP1.2402	HOTP1 outdoor termination kits 3 core paper	38
HOTP1.2402L	HOTP1 outdoor termination kits 3 core paper	38
HOTP1.2403	HOTP1 outdoor termination kits 3 core paper	38
HOTP1.2403L	HOTP1 outdoor termination kits 3 core paper	38
HOTP3.1201	HOTP3 outdoor termination kits 3 core belted paper	38
HOTP3.1201L	HOTP3 outdoor termination kits 3 core belted paper	38
HOTP3.1202	HOTP3 outdoor termination kits 3 core belted paper	38
HOTP3.1202L	HOTP3 outdoor termination kits 3 core belted paper	38
HOTP3.1203	HOTP3 outdoor termination kits 3 core belted paper	38
HOTP3.1203L	HOTP3 outdoor termination kits 3 core belted paper	38
HOTU3.1201	HOTU3 outdoor termination kits universal cables	37
HOTU3.1201L	HOTU3 outdoor termination kits universal cables	37
HOTU3.2401	HOTU3 outdoor termination kits universal cables	37
HOTU3.2401L	HOTU3 outdoor termination kits universal cables	37
HOTU3.2402	HOTU3 outdoor termination kits universal cables	37
KE10.1	Branching connectors	48
KE10.1N	Branching connectors	48
KE10.3	Branching connectors	48
KE10.504	Branching connectors	48
KE10.504N	Branching connectors	48
KE10.506	Branching connectors	48
LCK4-16-06A	Lamp post fixtures	48
LCK4-16-10A	Lamp post fixtures	48
LCK5-16-06A	Lamp post fixtures	48
LCK5-16-10A	Lamp post fixtures	48
LFB16.1-06A-R	Fuse bases	48
LFB16.1-10A-R	Fuse bases	48
LFB16-06A-R	Fuse bases	48
LFB16-10A-R	Fuse bases	48
LUG6-50/8LV	LUG shear head bolt cable lugs	12
LUG6-50/8LVTIN	LUG shear head bolt cable lugs	12
LUG6-50/10LVTIN	LUG shear head bolt cable lugs	12
LUG6-50/12LVTIN	LUG shear head bolt cable lugs	12
LUG50-95/10LV	LUG shear head bolt cable lugs	12
LUG50-95/10LVTIN	LUG shear head bolt cable lugs	12
LUG50-95/12LVTIN	LUG shear head bolt cable lugs	12
LUG50-95/14LVTIN	LUG shear head bolt cable lugs	12
LUG95-185/12LV	LUG shear head bolt cable lugs	12
LUG95-185/12LVTIN	LUG shear head bolt cable lugs	12
LUG95-185/14LVTIN	LUG shear head bolt cable lugs	12
LUG95-185/16LVTIN	LUG shear head bolt cable lugs	12
LUG150-300/12LV	LUG shear head bolt cable lugs	12
LUG150-300/12LVTIN	LUG shear head bolt cable lugs	12
LUG150-300/16LVTIN	LUG shear head bolt cable lugs	12
PMR2680.3	Branching connectors	48
PMR2680.4	Branching connectors	48
Rapid2.1/1	Rapid cable distribution cabinets	44
Rapid2.1/2	Rapid cable distribution cabinets	44
Rapid2.2/11	Rapid cable distribution cabinets	44
Rapid2.2/22	Rapid cable distribution cabinets	44
Rapid5.2/220	Rapid cable distribution cabinets	44
Rapid5.2/410	Rapid cable distribution cabinets	44
Rapid5.3/222	Rapid cable distribution cabinets	44
Rapid5.3/411	Rapid cable distribution cabinets	44

Product code	Product description	Page
SBO2.1	SBO cable breakouts	20
SBO2.2	SBO cable breakouts	20
SBO3.1	SBO cable breakouts	20
SBO3.3	SBO cable breakouts	20
SBO3.4	SBO cable breakouts	20
SBO3.5	SBO cable breakouts	20
SBO4.1	SBO cable breakouts	20
SBO4.2	SBO cable breakouts	20
SBO4.3	SBO cable breakouts	20
SBO4.4	SBO cable breakouts	20
SBO5.1	SBO cable breakouts	20
SBO5.2	SBO cable breakouts	20
SBO5.3	SBO cable breakouts	20
SBO5.4	SBO cable breakouts	20
SEC1.1	SEC cable end caps	20
SEC1.2	SEC cable end caps	20
SEC1.3	SEC cable end caps	20
SEC1.4	SEC cable end caps	20
SEC1.5	SEC cable end caps	20
SEC1.6	SEC cable end caps	20
SEC1.7	SEC cable end caps	20
SJA1	SJA additional kit for 3 core paper cables with Al-sheath to plastic cables	16
SJA2	SJA additional kit for 3 core paper cables with Al-sheath to plastic cables	16
SJA3	SJA additional kit for 3 core paper cables with Al-sheath to plastic cables	16
SJAP1	SJAP additional kit for 3 core paper cables with Al-sheath	17
SJAP2	SJAP additional kit for 3 core paper cables with Al-sheath	17
SJAP3	SJAP additional kit for 3 core paper cables with Al-sheath	17
SJCW2595.2	SJCW additional kits for AHXAMK-W earthing	42
SJCW70240.2	SJCW additional kits for AHXAMK-W earthing	42
SJE42	SJE additional kits 1 core XLPE to 3 core XLPE	28
SJE43	SJE additional kits 1 core XLPE to 3 core XLPE	28
SJE44	SJE additional kits 1 core XLPE to 3 core XLPE	28
SJE45	SJE additional kits 1 core XLPE to 3 core XLPE	28
SJEW10	HJT31 transition joint kits 3 core belted paper to 1 core XLPE	27
SJEW20	HJTW11 transition joint kits 3 core paper to AHAXMK-W	26
SJEW42	SJEW additional kits 3 core XLPE to AHXAMK-W	28
SJEW43	SJEW additional kits 3 core XLPE to AHXAMK-W	28
SJK0	SJK joint kits without connectors	16
SJK0C	SJK joint kit	16
SJK1	SJK joint kits without connectors	16
SJK1.1C	SJK joint kit	16
SJK1C	SJK joint kit	16
SJK2	SJK joint kits without connectors	16
SJK2.1C	SJK joint kit	16
SJK2C	SJK joint kit	16
SJK3	SJK joint kits without connectors	16
SJK3C	SJK joint kit	16
SJK4	SJK joint kits without connectors	16
SJK4C	SJK joint kit	16
SJKK2.47	SJKK joint kits with repair wrap	16
SJKK3.47	SJKK joint kits with repair wrap	16
SJKK4.47	SJKK joint kits with repair wrap	16
SJKV0C	SJKV joint kit	16
SJKV1C	SJKV joint kit	16
SJKV2C	SJKV joint kit	16
SJKV3C	SJKV joint kit	16
SJKV4C	SJKV joint kit	16
SJP120	SJP additional kit for 4 core paper cables with lead sheath to plastic cables	17
SJP240	SJP additional kit for 4 core paper cables with lead sheath to plastic cables	17
SJP50	SJP additional kit for 4 core paper cables with lead sheath to plastic cables	17
SJPK1	SJPK transition joint kit for 4 core paper cables with lead sheath to 4 core plastic	17
SJPK1C	SJPK transition joint kit for 4 core paper cables with lead sheath to 4 core plastic	17
SJPK2	SJPK transition joint kit for 4 core paper cables with lead sheath to 4 core plastic	17
SJPK2C	SJPK transition joint kit for 4 core paper cables with lead sheath to 4 core plastic	17
SJPK3	SJPK transition joint kit for 4 core paper cables with lead sheath to 4 core plastic	17
SJPK3C	SJPK transition joint kit for 4 core paper cables with lead sheath to 4 core plastic	17
SJPP120	SJPP additional kit for 4 core paper cables with lead sheath	17
SJPP240	SJPP additional kit for 4 core paper cables with lead sheath	17
SJPP50	SJPP additional kit for 4 core paper cables with lead sheath	17
SK160	Lamp post cabinets	49
SK160.1	Lamp post cabinets	49
SK160.1/M	Lamp post cabinets	49
SK160.2	Lamp post cabinets	49
SK160.2/M	Lamp post cabinets	49
SK160/M	Lamp post cabinets	49
SK175	Branch boxes	48
SK180	Branch boxes	48
SK180.25	Fuse boxes	49

Product code	Product description	Page
SK180.63	Fuse boxes	49
SRS3.1	SRS heat shrink repair wrap	20
SRS4.1	SRS heat shrink repair wrap	20
SRS4.15	SRS heat shrink repair wrap	20
SRS5.1	SRS heat shrink repair wrap	20
SRS5.15	SRS heat shrink repair wrap	20
SRS6.1	SRS heat shrink repair wrap	20
SRS7.1	SRS heat shrink repair wrap	20
SRS7.15	SRS heat shrink repair wrap	20
ST250	Insulation screen removal tools	52
ST250.1	Insulation screen removal tools	52
ST251	Additional tools	52
ST252	Medium voltage primary insulation removal tools	52
ST252.1	Medium voltage primary insulation removal tools	52
ST257	Outer sheath removal tools	52
ST257.1	Outer sheath removal tools	52
ST258	Additional tools	52
ST259	Outer sheath removal tools	52
ST260	Insulation screen removal tools	52
ST261	Medium voltage primary insulation removal tools	52
ST265	Medium voltage primary insulation removal tools	52
ST266	Medium voltage primary insulation removal tools	52
ST266.1	Medium voltage primary insulation removal tools	52
ST267	Medium voltage primary insulation removal tools	52
ST267.1	Medium voltage primary insulation removal tools	52
ST268	Medium voltage primary insulation removal tools	52
ST269	Medium voltage primary insulation removal tools	52
ST270	Medium voltage primary insulation removal tools	52
ST270.1	Medium voltage primary insulation removal tools	52
ST271	Medium voltage primary insulation removal tools	52
ST271.1	Medium voltage primary insulation removal tools	52
ST272	Medium voltage primary insulation removal tools	52
ST272.1	Medium voltage primary insulation removal tools	52
ST273	Medium voltage primary insulation removal tools	52
ST273.1	Medium voltage primary insulation removal tools	52
ST274	Medium voltage primary insulation removal tools	52
ST274.1	Medium voltage primary insulation removal tools	52
ST277	Cable stands	52
ST260.1	Insulation screen removal tools	52
ST280	Additional tools	52
ST281	Outer sheath removal tools	52
ST281.1	Outer sheath removal tools	52
ST285	Outer sheath removal tools	52
ST285.1	Outer sheath removal tools	52
ST286	Outer sheath removal tools	52
ST291	Outer sheath removal tools	52
ST308.1	Insulation screen removal tools	52
STA1	STA termination kit for paper cable with Al-sheath	19
STA1.0	STA termination kit for paper cable with Al-sheath	19
STA2	STA termination kit for paper cable with Al-sheath	19
STA2.0	STA termination kit for paper cable with Al-sheath	19
STA3	STA termination kit for paper cable with Al-sheath	19
STA3.0	STA termination kit for paper cable with Al-sheath	19
STA4	STA termination kit for paper cable with Al-sheath	19
STA4.0	STA termination kit for paper cable with Al-sheath	19
STE16	CIT1 indoor termination kits 1 core XLPE with Cu wire shield	39
STE16	COT1 outdoor termination kits 1 core XLPE with Cu wire shield	39
STE5	STE additional kits core shielding	38
STE5.3	STE additional kits core shielding	38
STE6	STE additional kits core shielding	38
STE6.3	STE additional kits core shielding	38
STKI11.27	STKI indoor termination kit 3+1 core	18
STKI12.27	STKI indoor termination kit 3+1 core	18
STKI13.27	STKI indoor termination kit 3+1 core	18
STKI14.27	STKI indoor termination kit 3+1 core	18
STKI1A	STKI indoor termination kit 4 core	18
STKI1A.27	STKI indoor termination kit 4 core	18
STKI2	STKI indoor termination kit 4 core	18
STKI2.27	STKI indoor termination kit 4 core	18
STKI3	STKI indoor termination kit 4 core	18
STKI3.27	STKI indoor termination kit 4 core	18
STKI4	STKI indoor termination kit 4 core	18
STKI4.27	STKI indoor termination kit 4 core	18
STKO10.27	STKO outdoor termination kit 3+1 core	18
STKO12.27	STKO outdoor termination kit 3+1 core	18
STKO13.27	STKO outdoor termination kit 3+1 core	18
STKO14.27	STKO outdoor termination kit 3+1 core	18
STKO1A	STKO outdoor termination kit 4 core	18
STKO1A.27	STKO outdoor termination kit 4 core	18

Product code	Product description	Page
STKO2	STKO outdoor termination kit 4 core	18
STKO2.27	STKO outdoor termination kit 4 core	18
STKO3	STKO outdoor termination kit 4 core	18
STKO3.27	STKO outdoor termination kit 4 core	18
STKO4	STKO outdoor termination kit 4 core	18
STKO4.27	STKO outdoor termination kit 4 core	18
STPKR1.27	STPKR termination kit for 4 core paper cables with lead sheath	19
STPKR1	STPKR termination kit for 4 core paper cables with lead sheath	19
STPKR3.27	STPKR termination kit for 4 core paper cables with lead sheath	19
STPKR3	STPKR termination kit for 4 core paper cables with lead sheath	19
STPKR4.27	STPKR termination kit for 4 core paper cables with lead sheath	19
STPKR	STPKR termination kit for 4 core paper cables with lead sheath	19
SV15	Branching connector sets	48
SV15.105	Lamp post fixtures	48
SV15.12	Lamp post fixtures	48
SV15.125	Lamp post fixtures	48
SV15.5	Branching connector sets	48
SV50	Branching connector sets	48
SVV3	Circuit breakers	49
SVV3.1	Circuit breakers	49
SVV3.2	Circuit breakers	49



ENSTO46/ENG/01/2023



ENSTO

Ensto Finland Oy
Ensio Miettisen katu 2, P.O. Box 77
FIN-06101 Porvoo, Finland
utility.networks@ensto.com

ensto.com